

2021

Market gardening  
Horticulture  
Landscape

PRODUCT  
CATALOG

# Terrateck

*La Technique au service de la Terre*



[www.terrateck.com](http://www.terrateck.com)





# EDITORIAL

This very special year 2020 ends to make way for a year 2021 that we all hope will be much better. A change of year that gives us the opportunity to confirm our support and confidence. The events we have just experienced have helped to raise awareness of the importance of local agriculture. Consumers are thinking differently, reinventing themselves by getting closer to local shops and urban agriculture.

What has been driving Terrateck for the last 8 years is an agriculture that is changing the face of our planet by producing vegetables that connect nature to mankind. Our challenge is to offer equipment and tools that are in line with the ecological agriculture of small and medium sized areas.

Producers committed to local agriculture have at heart to make food that is cultivated with passion and care flourish. Terrateck participates and accompanies this change with ingenuity and innovation through its wide range of equipment adapted to an agriculture that respects people and the environment.

Through the land, nature and its technical approach, Terrateck joins forces with you, the producers, to participate in the changes: Let's be ambitious, the adventure has just begun.



**Pierre & Romain**  
*Founders*

A company

# AT THE HEART OF INNOVATION

A committed and passionate company



ECO-FRIENDLY



PARTICIPATORY



INNOVATION



## DESIGN

Arising from an ongoing conversation between our engineering office and farmers, our equipment is tailored to the needs created by practical problems encountered in the field. The entire design function is conducted in-house using a CAD drawing application prior to manufacturing. In the belief that agriculture is going to experience a deep transformation over the next few years, our equipment gives producers the support they need in their daily activities, thanks to our core values of quality, productivity and respect for nature and mankind.

## MANUFACTURING


Terrateck has a workshop equipped with various pieces of metalworking equipment where it creates all its prototypes in-house. As for the mass-produced machines, we work in partnership with French and European subcontractors, based not far from our borders. All the assembly work is conducted in our workshops in order to ensure the highest standards of the delivered product.

## PROMOTION AND MARKETING

We love the outdoors, having our feet firmly planted on the ground! Terrateck's presence in the field is one of the key aspects of the close relationships it develops with producers. We conduct many demonstrations and are present at trade shows throughout the year in order to maintain our connections with the business sector at all times. Marketing operations are conducted directly or through a network of national and international retailers.

# Terrateck ONLINE

Launched one year ago now, our new website has been very popular with producers thanks to its simplicity and ergonomics. We are constantly striving to improve it to make it even more user-friendly and deliver the abundance of tools producers need in their daily lives!

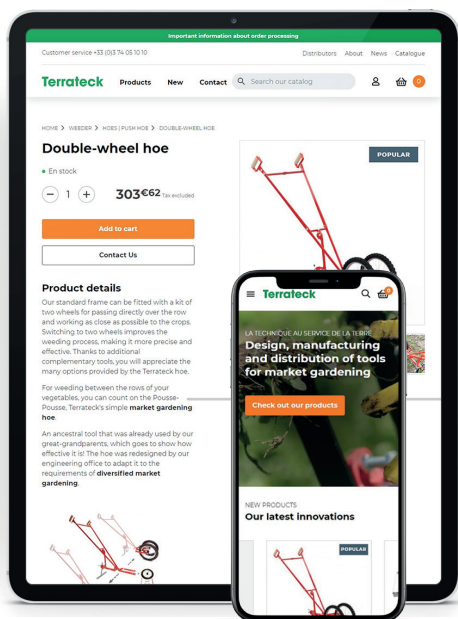

**Place your order**  
in a few clicks<sup>(1)</sup>



**Make secure payment**  
directly online<sup>(1)</sup>



**Follow the status**  
of your orders in real-time



**View and contact**  
our closest resellers




**Stay informed about the**  
release of our new products  
and upcoming events

<sup>(1)</sup> Online sales and payment features have not yet been deployed in all countries. Consequently, we would ask you to contact your Terrateck dealer or contact us by email at [contact@terrateck.com](mailto:contact@terrateck.com).

# Our product catalog

# TERRATECK.COM

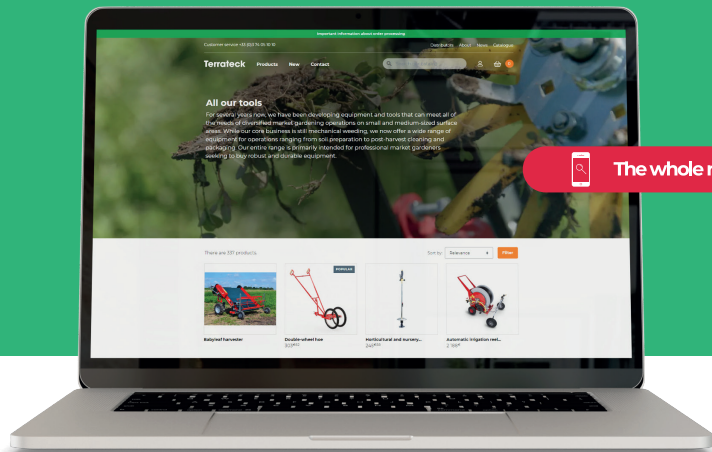

 The whole range on our website

There are a lot of new products this year and, to keep the catalogue small in size, we've decided to remove certain products from the paper version of the catalogue. Nevertheless, these products still exist and are available for sale on our website in addition to many new "web exclusives"!



**WEAR PARTS AND ACCESSORIES  
FOR TERRATECK TOOLS**



**FITTINGS AND PARTS  
FOR THERMAL WEEDERS  
AND GAS BOTTLES**



**SOLAR PUMP  
RANGE**



**FITTINGS AND PARTS FOR IR-  
RIGATION SYSTEMS**



**HARVESTING AND  
CLEANING BASKETS**




**MARKET GARDENING  
BAGS AND SATCHELS**

# Our Team



Manager /  
Engineering Office




Manager / Technical Sales  
Representative - Export




Administration/  
Accounts



Technical Sales  
Representative - France




Technical Sales  
Representative - France




Technical Sales  
Representative - France



Engineering Office




Engineering Office




Purchases




Communication /  
Marketing



Communication /  
Marketing



Technical and operational  
manager




Workshop / Assembly



Workshop / Assembly



Workshop / Assembly



Assembly / Outgoing stock  
warehouse keeper



Assembly / Incoming stock  
warehouse keeper





Administrative  
secretary



Technical Sales  
Representative - Export

# Table of **CONTENTS**

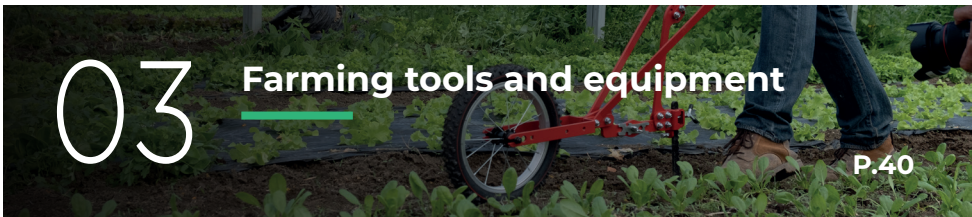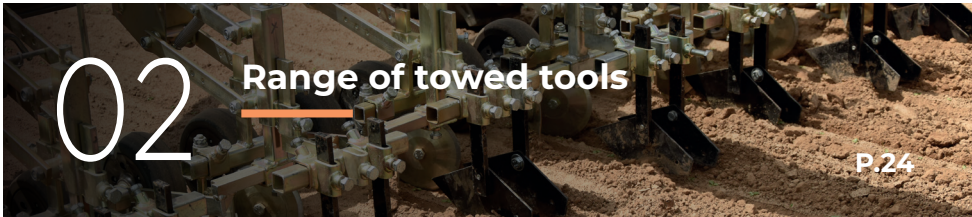



# TOOL CARRIER

DIVERSIFIED MARKET GARDENING TOOL CARRIER A-SERIE

TOOL CARRIER E-SERIE FOR OPEN FIELD VEGETABLE PRODUCTION

GLIDER 2000 - ELECTRIC TOOL CARRIER

GLIDER 500 - ELECTRIC PICKING ASSISTANT

## DIVERSIFIED MARKET GARDENING TOOL CARRIER A-SERIE



YANMAR 3-CYLINDER DIESEL ENGINE 23 HP

VENTRAL/REAR LIFT CAPACITY 300 kg

TRACK 1,5 m to 1,7 m

SPEED 400m/h (min) - 18km/h (max)

HYDRAULIC BELLY AND REAR LIFT

POWER STEERING

HYDROSTATIC POWER

The Culti'track tool carrier is the compromise between a heavy-duty tiller and a tractor. It is a small self-propelled tool carrier. This high-clearance is designed for diversified market gardening and can be used to carry out every task from sowing to harvesting. The Culti'Track is equipped with a belly lift and is the only that allows you to work independently during mechanical weeding operations (hoeing, ridging, thermal weeding, harrowing, etc). The high position of the seat allows you to carry out work with great precision and without getting tired. The Culti'track rear linkage is a backup for the belly lift for carrying out seeding operations, carrying gas bottles, eradicator tines or a tine

harrow (in addition to the hoeing elements on the belly position), rear bucket, etc. So that the operator can devote all their attention to the work that needs to be done, the entire control system is governed by a joystick that is used to activate the different lifting operations (belly, rear, auxiliary outlet). This joystick also controls the progress of the tool-carrier. The rate of progress is proportional to the thrust. The original version offers two speed ranges; a speed of travel for getting to the plot of land as quickly as possible (0 to 18 km/h) and a working speed for working with greater precision. The track of the Culti'track tool-carrier can be adjusted – from 1.5 to 1.8 m – to suit conventional market gardening strips.

# OPTIONS TOOL CARRIER A-SERIE



**REINFORCED REAR  
LIFT - 600KG**  
T000260



**23HP STANDARD  
FRONT LIFT - 300KG**  
T000261



**6 KW HYDRAULIC PTO**  
T000259



**4 WHEEL DRIVE KIT**  
T000238



**ROTATING LIGHT**  
T000253



**DOUBLE  
BAR FRAME**  
T000231



**DOUBLE-EFFECT FRONT/  
REAR HYDRAULIC OUTPUT**  
T000254




**AUTOMATIC COUPLING  
ARMS SET**  
T000236

## OTHER OPTIONS AVAILABLE


Offset driving position	T000232
Floating lift	T000269
Lighting kit (work light, indicators, rear position light)	T000268

# EQUIPMENT FOR TOOL CARRIER A-SERIE


EXAMPLE OF ARGUS HOE ASSEMBLY:

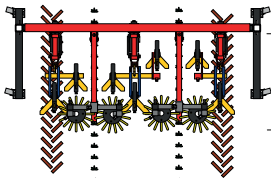

2 rows

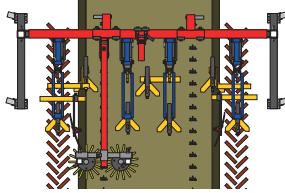


2 polyvalent rows 3 rows

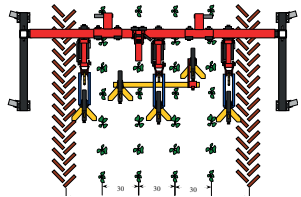


4 rows

EXAMPLE OF DUO HOE ASSEMBLY:

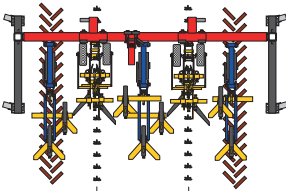


2 rows

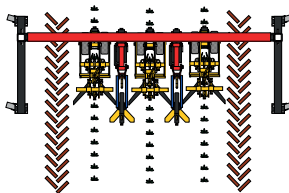

3 rows



ADJUST YOUR HOEING MACHINE WITH YOUR TERRATECK TECHNICIAN

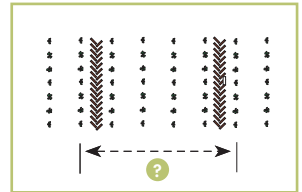

The whole range on our website

## TOOL CARRIER EQUIPMENT



1.80M VIBRO BED  
T000264



SEEDER 1 TO 5 ROWS  
N000154



LOCALISED FERTILISER  
1 TO 5 ROWS  
T000255



SLUG PELLETS SPREADER  
T000251



AUTOMATIC 3-POINT  
LINKAGE  
T000250



ELECTRIC SPRAYER  
8 NOZZLES - 4M  
T000249



UNCOUPLING TOOL  
T000263



MULCH LAYING  
MACHINE



## TOOL CARRIER E-SERIE FOR OPEN FIELD VEGETABLE PRODUCTION



YANMAR 3-CYLINDER DIESEL ENGINE

25/35HP

HYDRAULIC BELLY AND REAR LIFT

POWER STEERING

HYDROSTATIC POWER

VENTRAL/REAR LIFT CAPACITY

800 kg/ 300 kg

TRACK

1,5 m to 1,8 m

SPEED

400m/h (min) - 12km/h (max)

This high-clearance is designed for diversified market gardening and outdoor vegetable growing and can be used to carry out every task from sowing to harvesting. The Cultitrack is equipped with a belly lift and is the only that allows you to work independently during mechanical weeding operations (hoeing, ridging, thermal weeding, harrowing, etc). The high position of the seat allows you to carry out work with great precision and without getting tired.

The Cultitrack E-serie is equipped with various types of hoe for working on strips up to 6 m wide.

The Cultitrack rear linkage is a backup for the belly lift for carrying out seeding operations,

carrying gas bottles, eradicator tines or a tine harrow (in addition to the hoeing elements on the belly position), rear bucket, etc.

So that the operator can devote all their attention to the work that needs to be done, the entire control system is governed by a joystick that is used to activate the different lifting operations (belly, rear, auxiliary outlet). This joystick also controls the progress of the tool-carrier.

The hydrostatic rate of progress is proportional to the thrust. In its original version, there are two available speed ranges: a speed of travel for getting to the plot of land as quickly as possible (0 to 15 km/h) and a working speed for working with greater precision.

# OPTIONS FOR TOOL CARRIER E-SERIE



**REINFORCED REAR LIFT**  
- 600KG  
T000260



**STANDARD FRONT LIFT**  
- 300KG  
T000261



**6 KW HYDRAULIC PTO**  
T000259



**4 WHEEL DRIVE KIT**  
T000238



**MANUAL FOLDING BEAM**  
Hydraulic: T000243  
Manual: T000244



**DOUBLE BAR FRAME**  
T000231



**DOUBLE-EFFECT FRONT/ REAR HYDRAULIC OUTPUT**  
T000254



**AUTOMATIC GUIDANCE (CAMERA)  
AUTOMATIC GUIDANCE (GPS)**  
T000233




**VENTRAL REAR HYDRAULIC 3 POINT**  
T000247

## OTHER OPTIONS AVAILABLE


Offset driving position	T000267
Floating lift	T000269
Lighting kit (work light, indicators, rear position light)	T000268
Rotating light	T000253

# EQUIPMENT FOR TOOL CARRIER E-SERIE

EXAMPLE OF ARGUS HOE ASSEMBLY:

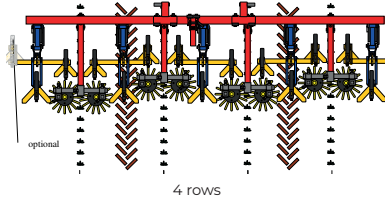


4 rows

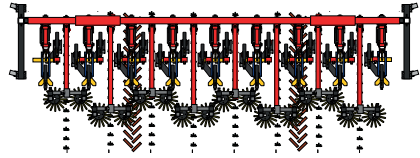

8 rows


EXAMPLE OF DUO HOE ASSEMBLY:

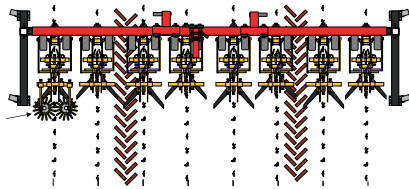

8 rows



ADJUST YOUR HOEING MACHINE WITH YOUR TERRATECK TECHNICIAN

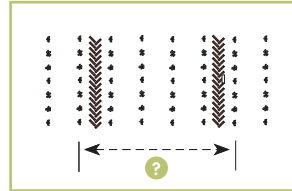

The whole range on our website

## TOOL CARRIER EQUIPMENT



LOCALISED FERTILISER  
1 TO 5 ROWS  
T000255



SLUG PELLETS SPREADER  
T000251



AUTOMATIC 3-POINT  
LINKAGE  
T000250



ELECTRIC SPRAYER  
8 NOZZLES - 4M  
T000249



UNCOUPLING TOOL  
T000263



TOOL BAR  
T000235



## GLIDER 2000 - ELECTRIC TOOL CARRIER



NEW

REFERENCE : T000403

Used from sowing through to harvesting, this electric tool carrier is a multi-purpose piece of equipment that is suitable for conducting superficial work requiring precision and ergonomics. At the request of producers, we developed a tool carrier that fulfils the requirements of the most demanding producers.

This robust, manoeuvrable, economical and quiet machine can be used in greenhouses (crop supports must be at a height of 2.30m) as well as in open fields.

Equipped with a standard battery pack that delivers 4 to 8 hours of battery life (depending on weather conditions, the number of people being carried and type of terrain). By adding an extra battery pack, the battery life of the tool carrier can be doubled, providing a full day of working. Equipped with a mobile wired remote control, you can easily operate the Glider

2000 according to the work in progress. Thanks to the arched structure of this electric tool holder, it provides a very wide range of tool arrangements as well as the ability to pass underneath the machine. The operator can easily get on and off the machine because there is no frame to step over.

Various Options can be added to the Glider 2000 tool carrier, making it the ideal solution for improving working conditions in market gardening.

The Glider 2000 was also designed to carry loads (400Kg) during harvesting/planting operations on the front and central section of the machine. There is the option to mount an electric power lift in order to add a toolbar/pallet lift.

**NEW**

# GLIDER 2000 - ELECTRIC TOOL CARRIER




**ERGONOMIC  
BENCH**  
T000400



**SWIVEL CRATE HOLDER**  
T000411



**BUTT-TRAINER SEAT**  
T000408



**GLIDER 2000  
CANOPY TARP**  
T000404



**FRONT AND CHEST HARVEST  
CRATE HOLDER**  
T000406



**CENTRAL ELECTRIC  
POWER LIFT KIT**  
T000410



**PALLET LIFT APRON**  
T000409



**LOW PLANTING SEAT**  
T000407



**SWIVEL HARVESTING  
SEAT**  
T000408

OTHER OPTIONS AVAILABLE	
Accessories holder	T000405
Additional battery pack	T000414

## GLIDER 500 - ELECTRIC PICKING ASSISTANT



The Terrateck Glider 500 is a working aid used to carry people in an ergonomic position for manual weeding and planting operations.

At the request of producers, we developed a tool carrier that fulfils the requirements of the most demanding producers.

**A lightweight, handy, economical and silent piece of equipment that can be used in a greenhouse or in the open fields, that is perfect for monitoring crops.**

Equipped with a standard battery pack that delivers six hours of battery life (depending on weather conditions, the number of lying down people and type of

terrain). By adding an extra battery pack, the battery life of the tool carrier can be doubled.

This lightweight carrier is fitted with Terrateck's ERGO benches. Ensuring good shoulder and chest support and fully adapted for men and women thanks to its ergonomic double bench system that does not exert pressure on the chest.

Easily transportable, it can be loaded onto a small trailer so you can get to your most remote fields.

Options:  
- Canopy  
- Crate holder

# GLIDER 500 - ELECTRIC PICKING ASSISTANT



**ERGONOMIC BENCH**  
T000400



**CANOPY FOR GLIDER 500  
MULTI-PURPOSE PICKING ASSISTANT**  
T000401



**CRATE HOLDER**  
T000453





# RANGE OF TOWED TOOLS

ROTOBINE ROTARY HOE

MARKET GARDENING HOE

HOEING MACHINE FOR PLASTIC MULCH

ARGUS MARKET GARDENING CULTIVATOR

DUO PRECISION MARKET GARDENING CULTIVATOR

WEEDING ELEMENTS AND COMPONENT WEAR

MULTIPLE INTERROW TILLER

MARKET GARDEN CULTIVATOR CAMERA

150CM VEGETABLE CROP SPIKE HARROW

FLAME WEEDER FOR VEGETABLE CROPS

POTATO/ONION PRODUCTION

EBRA VEGETABLE TRAILED SEEDER

## ROTO'BINE ROTARY HOE



STANDARD 3-POINT LINKAGE

HYDRAULIC DOUBLE ROTOR

BUILT-IN HYDRAULIC POWER PLANT

50 L

VARIABLE ROTOR SPEED

STEEL TEETH, BRUSHES OR FINE HARROWS

REVERSE ROTATION OF THE ROTORS (BOURAGE)



ADJUSTING THE WORKING DEPTH

FOR TOOL CARRIER OF 40HP OR MORE

The Roto'bine weeder is a rotary weeding tool for widely spaced crops (cabbage, beetroot, celery, herbs, etc). The two rotors, which are fitted on pivots, are guided by the person seated above. The view overlooking the seed row and the rotors makes it possible to carry out high-quality weeding at a lower cost (no camera, probe, GPS, etc). A knob is used to adjust the rotational speed of the rotors in order to adapt to the climatic conditions and to the soil.



ROTO'BINE ROTARY HOE  
T000012

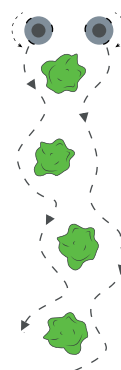


SINGLE-ROW ROTO'BINE  
2 hoeing elements

# MARKET GARDENING HOE



A CONFIGURATION TO SUIT YOUR NEEDS:


From 1 row to 18 rows

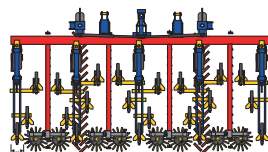


4 rows

FOR SCENTED, AROMATIC AND MEDICINAL PLANTS AND WIDELY SPACED CROPS

For this range of very robust hoeing machines, we have put every effort into ensuring uncompromising stability for working widths of more than 2.5 m. These hoeing machines are designed for front or rear attachment. The parallelograms' guide wheels with pivoting axles facilitate the hoeing work.

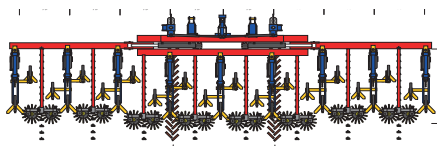


8 rows

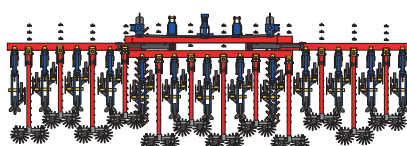

12 rows



ADJUST YOUR HOEING MACHINE WITH YOUR TERRATECK TECHNICIAN

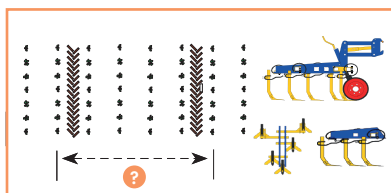

The whole range on our website


## HOEING MACHINE FOR PLASTIC MULCH



TRACK	1 m to 2,20 m
MULCHING	Plastic, woven, biodegradable
WIDTH	90 cm to 220 cm
BRUSH	3 hardness levels
HYDRAULIC	Single stroke / Free return
PROTECTION	Soil spray protection
STEERING	Rear manual operation with 3rd tine
COMES WITH	Complete

This hoe is composed of a classic hoe chassis with manual control. Hydraulically propelled rotating brushes are mounted on a parallelogram frame to ensure hoeing along the edge of plastic mulching. This brush weeder is made of several levels of bristle that adjust the brush's power to the thickness of the plastic mulch. These components have a wide adjustment range that correspond to producer's different methods and to the varied machines used to lay plastic mulching. This hoe can be used on plastic, woven, and geo-textile mulch but also on biodegradable

mulch. This hoe adapts to all type of mulch widths from 90cm to 220cm. This hoe may be used flat or on raised bed. One need only adjust the brushes, so they are parallel to the ground. The Terrateck brush hoe makes it possible for precision mechanical weeding in one passage. The hydraulic brush's mechanical action leaves no room for weeds. As a result, rows of plastic mulching stay clean and require no manual weeding which is often physically constraining and can cause musculoskeletal disorders.




### HOE ADAPTER KIT (SQUARE GIRDER):

- 2 parallelograms
- 2 hydraulic brushes
- 1 speed adjuster
- 1 rotation reverser

Single stroke hydraulic + return

Reference : T000002

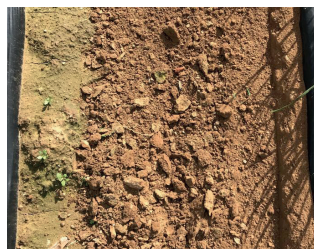

# HOEING MACHINE FOR PLASTIC MULCH



**LEFT OR RIGHT BRUSH HOE GUIDES  
TO FIT ON A 40X40MM FRAME**

Left: T000005  
Right: T000006



**SOFT BRUSH RING  
(WHITE)**  
T000008



**MEDIUM BRUSH RING  
(BLUE)**  
T000009



**HARD BRUSH RING  
(ORANGE)**  
T000010



**REPLACEMENT BRUSH KIT  
FOR BRUSH HOE**  
T000007




# ARGUS MARKET GARDENING CULTIVATOR




The ARGUS market gardening hoes mounted to the front or rear linkage give the operator greater visibility of the work being done at the centre of the hoeing elements in the ground. These very versatile hoeing machines can be customised and accessorised according to your crop plan and your soil. It is possible to adapt the various hoeing and ridging accessories...

## A CONFIGURATION TO SUIT YOUR NEEDS:


From 1 row to 12 rows




2 rows



3 rows

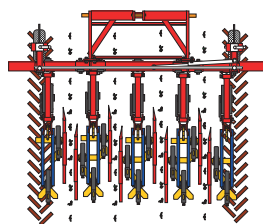


4 rows




Plastic mulch hoeing

## ADJUST YOUR HOEING MACHINE WITH YOUR TERRATECK TECHNICIAN

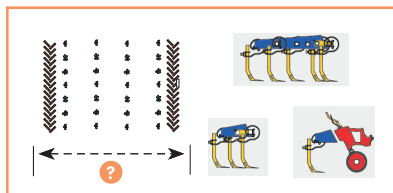

The whole range on our website

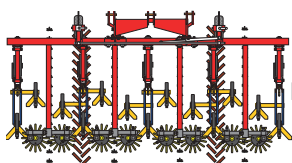


4 rows

# DUO PRECISION MARKET GARDENING CULTIVATOR




ADJUST YOUR HOEING MACHINE WITH YOUR TERRATECK TECHNICIAN

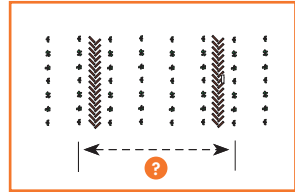


The whole range on our website

The KRESS/KULT branded DUO hoeing machines are made for efficiently and rapidly carrying out precision mechanical weeding operations on vegetable farms. When fitted to a rear linkage, these "lightweight" yet very robust hoeing machines are perfectly suited to mechanical weeding operations in terms of their efficiency, productivity and accuracy. The precision hoeing machines equipped with DUO parallelograms are really very effective for delicate seed crops such as carrots, beetroot, chicory, turnips, etc.

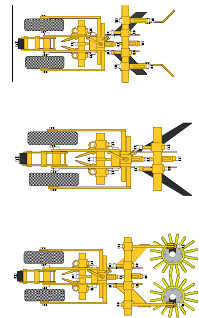

A CONFIGURATION TO SUIT YOUR NEEDS: FROM 1 ROW TO 12 ROWS

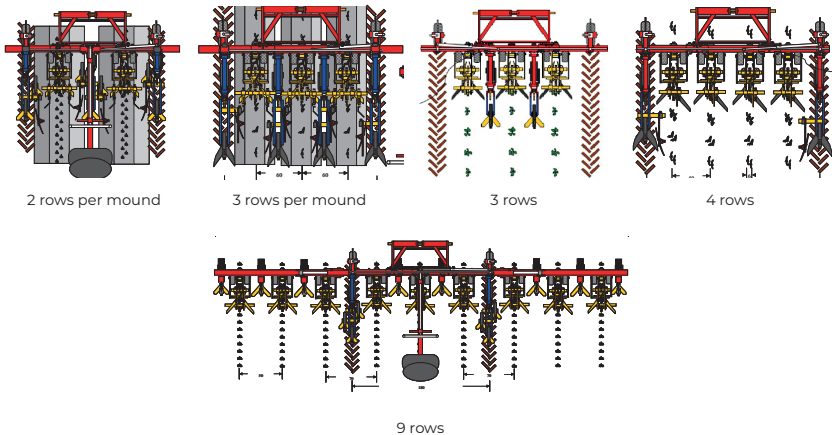

# WEEDING ELEMENTS AND COMPONENT WEAR

The company Terrateck offer the complete product line and spare parts for vegetable weeding systems. All these parts are adapted to fit on the cultivators ARGUS, DUO, HABICHT, MONOSEM, CARRE ... and guaranteed service on all the component wear.

**CONFIGURE YOUR HOEING MACHINE WITH THE HELP OF OUR TEAMS**

Phone: + (33) 03 74 05 10 10  
 EMail : [contact@terrateck.com](mailto:contact@terrateck.com)

 [The whole range on our website](#)

## A COMPLETE PRODUCT LINE OF DUCK FEET AND WEEDING KNIVES



**STANDARD DUCK FOOT**  
 Standard duck foot 12 to 34 cm for shanks 10x30 mm




**L-ANGLE KNIFE**  
 Special flat knives 14 to 67 cm with shank 10x30 mm



**REINFORCED KNIFE**  
 Reinforced duck foot 15 to 25 cm for shank 10x32 mm

## A COMPLETE PRODUCT LINE OF RIDGING ELEMENTS

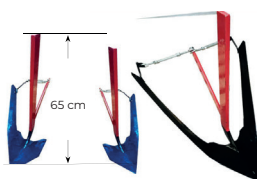

**ADJUSTABLE BLADE TO WEED BETWEEN RIDGES**



**LOW RIDGING ELEMENT TO MOUNT ON SHANK 10x32 mm**



**RIDGING ELEMENT WITH SHANK MEASUREMENT 20x50 mm**

## WEEDING IN THE CROP LINE WITH THE FINGER WEEDER




Sandy soil



Medium hard soil



Heavy soil and stony

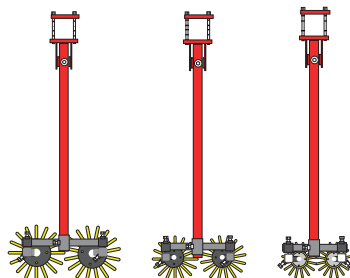

## MULTIPLE INTERROW TILLER



**WEEDER WIDTH** From 1 m to 6 m

**CHASSIS CLEARANCE** From 50 cm to 78 cm depending on models

**OPTIONS** Localised fertilisation / Steering / Buffer / Fold-away hydraulic

The Terrateck multiple interrow tiller provide mechanical weeding with rotational disks driven by 540T/min. Mounted on the rear power lift, they are especially efficient in remedial weed control. In fact, if weeding by goosefoot shovels could not take place, weed growth develops and weeding by goosefoot shovel becomes impossible. The multiple interrow tiller are the cure as the disk's mechanical action combines the soil with the weed. The disk also makes it possible to break into very compact soils and lighten interrow soil.

### AVAILABLE IN THREE VERSIONS:

#### LIGHTWEIGHT SOIL FL

Width of strawberries:  
14-18 / 18-22-26 / 30-34-36 /  
42-46-50 / 54-56-60 / 72-76

#### MIDWEIGHT SOIL FP

Width of strawberries:  
27-30 / 30-35-40 / 45-50-55 /  
60-65-70 / 75-80 / 90-95-100

#### HEAVY ROCK SOIL FPSR

Width of strawberries:  
27-30 / 30-35-40 / 45-50-55 /  
60-65-70 / 75-80 / 90-95-100

## MARKET GARDEN CULTIVATOR CAMERA

With this new range of guidance systems using a colorimetric camera, K.U.L.T provides the best available technologies for ultra-precise hoeing (<1cm).

The sturdy frames are supported by disc wheels that stabilise the whole structure. Given that the camera can see the whole strip, it works on all market gardening crops as soon as the rows are clearly visible to the naked eye.

Thanks to an interface equipped with a 3-point linkage at the rear, you can modernise all your cultivators.

- + KULTiVision PV for hoeing 1 to 3 strips or up to 4m.  
 Row spacing from 5cm.  
**Market gardeners love it.**
- + KULTiVision SV for large widths (4 to 12m) and very heavy machines.  
 For large industrial crops and vegetables.

KULTiSelect is the In-row cultivator of the KULT range. Ideal for inter-plant hoeing for salads, cabbage, beets and other mini-cloids





## 150CM VEGETABLE CROP SPIKE HARROW



**150CM VEGETABLE  
CROP SPIKE HARROW**  
N000002

<b>1 ITEM</b>	150 cm
<b>TEETH</b>	6/7 mm in diameter, length 380 mm
<b>DISTANCE BETWEEN TEETH</b>	25 mm
<b>FLEXIBLE SCOPE OF WORK</b>	
<b>FOLLOWS GROUND AND FORCED GROUNDING CONTOURS</b>	
<b>MANUAL ADJUSTMENT OF TEETH SLANT</b>	



The spike harrow is attached to the 3 point hitch. This tool can be used for all vegetable crops.

With a usage speed reaching up to 12km/hour, the use of the spike harrow can destroy most adventine growth at early stages of development. This tool is used for weeding on pre-sowing cultivation or on seedlings. The adventives must be at the filament / cotyledon stadium.


The spike harrow can be mounted on a with a back CAT 2 hitch or on our Cultitrack tool carrier.

This is a means of fighting weeds that complements hoeing. The gauge wheels guarantee a height adjustment for crops on flat or raised beds.

# FLAME WEEDER FOR VEGETABLE CROPS



HEIGHT ADJUSTMENT

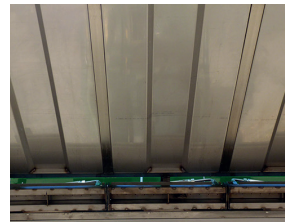

RECTANGULAR HIGH-YIELD BURNER

<b>GAS</b>	In liquid form
<b>3-POINT MOUNT</b>	Cat.1 / Cat.2
<b>WHEEL HEIGHT ADJUSTMENT</b>	360 / 100 mm
<b>FLAME INSULATION</b>	Stainless steel
<b>HIGH YIELD</b>	Chain casing insulation
<b>IGNITION</b>	Electric

Terrateck offers quality flame weeders for inter-row or overall work. These flame weeders use high-yield rectangular burner heads to ensure complete burning of the worked surface. These soldered mechanical chassis are equipped with stainless steel burners / deflectors to increase burn heat while reducing gas consumption.

A complete line is available ranging from localised thermal weeding to full work with a width of 100cm / 120cm / 150cm / 180cm / 200cm / 220cm / 240cm

These thermal weeders can be powered with gas cylinders (x) or by frontal gas bottles.

# POTATO/OIGNON PRODUCTION



POTATO HARVESTER - DM 50  
N000849



POTATO HARVESTER - DM 100  
N000827

The equipment range offered by Terrateck for potato production makes it possible to act from planting to harvesting. This equipment of Italian origin is known for quality production and technicality with regards to available options. From planting to harvesting by way of ridging and haulm topping, this range meets all production needs in small and medium surface areas.



ELEVATOR POTATO DIGGER



POTATO DIGGER WITH BELT OR DWARS SHAKER



RANGE OF VIBRO-RIDGERS



POTATO LEAVES CHOPPER



RANGE OF BABY AND STANDARD PLANTERS

# EBRA VEGETABLE TRAILED SEEDER



**MS21**  
LIGHT SOILS



**SU201**  
HEAVY SOILS

The EBRA seeder is a mechanical seeder with aluminium disk distribution. Simple, robust, and multi-purpose, it enables quality seeding for diversified vegetable crop operations. Thanks to its two large diameter wheels, it rolls over the earth smoothly and will not pack it down as much. There is a range of seed discs for precisely sowing all types of seeds.

The row density is adjusted with gear wheels that makes it possible to regulate the seeder to the sown crop.

These spreaders are available in 2 versions:  
**DYNAMIC AND EXPERT AND FROM 1 TO 6 ROWS**

Different options are available: rubber rear wheel, clod clearer iron, spreader seed boot, micro-granule applicators, fertilisers, etc.



**OTHER DISKS AVAILABLE**  
page 67

	DYNAMIC	EXPERT
Seed depth adjustment	●	●
Seed depth indicator	●	●
Density adjustment chart	●	●
Disk rack		●
Rear wheel scraper		●
Storage box		●
Plate for reducing hopper volume		●
Bearing wheels		●



# FARMING TOOLS AND EQUIPMENT

HOES AND ACCESSORIES

WHEEL TILLERS AND WEEDERS

HANDLE TOOLS

MULTI-PURPOSE HANDLE

STAKE AND SHRUB PULLER

POST RAMMER

MANUAL PLANTERS

SMALL BULB PLANTER

PAPERPOT PLANTER

MANUAL SEEDER FOR CELL PLANTER TRAYS

MULTI-ROW SEEDER

EBRA SEEDER

MANUAL MARKET GARDEN SEEDER

FILM MULCHING MACHINE

PLASTIC MULCH PERFORATOR-ROLLER

PLASTIC MULCH HOLE PUNCHER

THERMAL WEEDING

HARVESTING EQUIPMENT

CLEANING AND WATERING GUNS

REEL/UNWINDER FOR DRIP IRRIGATION

HOSE

WATERING AND IRRIGATING

MANUTENTION ET TRANSPORT

PACKAGING AND DIRECT SALE



Jean-Martin Fortier - Crédit Photos : Alex Chabot

# SINGLE/DOUBLE GARDENING HOE



**SINGLE GARDENING HOE**  
T000322



**DOUBLE GARDENING HOE**  
T000372

**WEIGHT** 6,5 kg / 8,5 kg

**LENGTH** 1430 mm

**WIDTH** 550mm (arms)

**HEIGHT** Min 700 mm / Max 900 mm

**UTILISATION** Garden

**SOLD WITHOUT TOOLS**

## PROFESSIONAL SINGLE WHEEL HOE



LENGTH	1 350 mm
WIDTH	500 mm (arms)
HEIGHT	min 800 mm / max 1 100 mm
WEIGHT	7,5 kg
WARRANTY	1 year

SOLD WITHOUT TOOLS


The «Terrateck Market Gardening Hoe» is a multi-purpose cultivator tool for market gardeners and home gardeners. It can be used to easily mechanise your seedling preparation, hoeing, weeding and ridging work. A comprehensive range of tools is available for facilitating the everyday maintenance of your crops. This multi-purpose and scalable tool can be adapted to any type of soil and crop. The Terrateck maintenance-free hoe is very popular because it is manoeuvrable, versatile and has been built to last.



SINGLE WHEEL HOE  
T000324



WALL FIXTURE WITH  
HOOK FOR HOES  
T000034

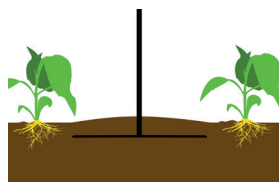

RANGE OF ACCESSORIES  
p 46 - 47

# PROFESSIONAL DOUBLE WHEEL HOE




**DOUBLE WHEEL HOE**  
T000371

LENGTH	1 350 mm
WIDTH	280 mm (center)
HEIGHT	min 800 mm / max 1 100 mm
WEIGHT	9 kg
WARRANTY	1 year
<b>SOLD WITHOUT TOOLS</b>	



**2-WHEEL KIT**  
T000329

Our standard frame can be fitted with a kit of two wheels for passing directly over the row and working as close as possible to the crops. Switching to two wheels improves the weeding process, making it more precise and effective. Thanks to additional complementary tools, you will appreciate the many options provided by the Terrateck hoe.

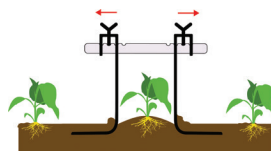

**RANGE OF ACCESSORIES**  
p 46 - 47



# SINGLE HOE ACCESSORIES



**MARKET GARDENING HOE  
(CAN BE RECUT)**  
300 mm : T000330  
500 mm : T000331



**REINFORCED  
COLLINEAR BLADE**  
250 mm : T000332  
450 mm : T000333  
700mm : T000334



**VEGETABLE BLADE PLANET JR**  
125 mm : T000335 / 175 mm : T000336  
225 mm : T000337 / 275mm : T000338



**UNIV. OSCILLATING  
STIRRUP HOE BRACKET L  
125-275MM**  
T000364



**UNIV. OSCILLATING  
STIRRUP HOE BRACKET M  
UNTIL 175MM**  
T000365



**UNIV. OSCILLATING  
STIRRUP HOE BRACKET S  
FOR 125MM**  
T000366



**RIDGER 100 MM**  
T000307  
**RIDGER 200 MM**  
T000308



**HALF-RIDGER**  
T000314



**MONO-DISC RIDGER**  
Right : T000343  
Left : T000344



**OSCILLATING STIRRUP HOE**  
125 mm : T000360 / 175 mm : T000361  
225 mm : T000362 / 275 mm : T000363



**LARGE FRAME**  
600 mm : T000358  
800 mm : T000359



**3-TINES CULTIVATOR**  
T000317



**5-TINES CULTIVATOR**  
T000318



**FITTING FOR A TINE HARROW  
(EXCLUDING SPRINGS)**  
T000357



**HEAVY / LIGHT SPRINGS  
(EXCLUDING BRACKET)**  
Heavy : T000349 / Light: T000348



**BAR CLAMP  
600/800 MM**  
T000326



**ROLLER FRAME**  
T000306



**PACKER ROLLER**  
T000351



**SEEDLING ROLLER**  
T000352



**TILLER ROLLER**  
T000347

# DOUBLE HOE ACCESSORIES



**2-WHEEL CONVERSION KIT**  
T000329



**BIO-DISCS**  
T000304




**LELIEVRE BLADES**  
T000316



**PRECI-DISCS**  
T000346

## HOEING ON THE ROW

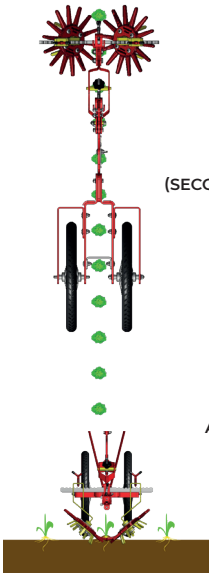

**FINGER WEEDER**  
(SECONDARY TOOL FITTING INCLUDED)  
Yellow (medium soil): T000310  
Orange (sandy soil): T000311



**TORSION WEEDER\***  
T000353



**DRIP IRRIGATION MOUNT KIT\***  
T000319



**MANUAL SPIKE HARROW ADAPTER FOR VEGETABLE HOE**  
T000303

## FRAME OPTIONS



**OFFSET ARM ASSEMBLY**  
T000327



**SECONDARY TOOL FITTING**  
T000328

## SPARE PARTS



**14' WHEEL**  
Only: T000354  
Puncture proof: T000355



**CLAMP**  
T000305



**BUTTERFLY SCREW**  
T000367



**14' INNER TUBE**  
T000309



**2 WOODEN GRIPS**  
T000345

\*Needs the option second tool

## LANDSCAPER CULTIVATOR SCALP COM



LENGTH	1 350 mm
WIDTH	Min 380 mm / Max 480 mm
HEIGHT	Min 800 mm / Max 1100 mm
WEIGHT	8 kg
WARRANTY	1 year
SOLD WITHOUT TOOLS	

The SCALP COM is a tool based on the principle of the market gardening hoe. This tool mechanises weeding operations on gritted and stabilised surfaces without the need for chemical products.

The maintenance-free SCALP COM, designed by Terrateck is very popular because it is manoeuvrable, versatile and has been built to last. It is fully modular and designed to be adapted to the user: tool handle incline adjustment, tool height and width adjustment.

The option to adjust the spacing between the handles means that you can work in relatively inaccessible spaces (between graves, up against walls).



**FOLDING ARMS**  
T000356



**FIXED ARM**  
T000324



**REINFORCED COLLINEAR BLADE**  
250 mm : T000332  
450 mm : T000333  
700 mm : T000334



**FITTING FOR A TINE HARROW  
(WITHOUT SPRINGS)**  
T000357



**SECONDARY TOOL FITTING**  
T000328



**HEAVY SPRINGS**  
T000349

## SPIKE HARROW



LENGTH 1 470 mm

WIDTH 790 mm (spike harrow)

HEIGHT Min 800 mm / Max 1 100 mm

WEIGHT 25 kg

WARRANTY 1 year

SOLD WITHOUT TOOLS

The spike harrow is used to carry out weeding at the filament/cotyledon stage on young seedlings. This equipment can also be used with false seedbed techniques on a width of 80 cm. Unlike a thermal weeder, the spike harrow does not have a germinating effect by causing a thermal shock. This equipment is also used by businesses in the sector of parks and recreation areas in order to flatten and weed gravelly areas.



**SPIKE HARROW**  
T000321



**HEAVY TINE HARROW KIT**  
T000350



## WHEEL TILLER/WEEDER



USABLE WIDTH 120 / 180 / 270 mm

WEIGHT 4 kg / 5 kg / 6 kg

WARRANTY 1 year

SUPPLIED WITHOUT A HANDLE

### REFERENCE :

SIMPLE : 120 mm : T000070 / 180mm : T000071 / 270 mm : T000072

DOUBLE : 180 mm : T000073 / 270mm : T000074

Wheel tiller/weeders are hand weeding tools with a combination of tines and a stirrup hoe. Particular suited to gravelly earth with a hard topsoil, the tines of the wheel tiller break up the hardened topsoil, decapitate undesirable weeds and mix the heads of the weeds with the soil thanks to the two-way motion of the tiller. This rotating weeding tool is easier to use than a hand tool because of the tines that help the device to roll making it faster to use than a simple hand hoe. Also usable in wet soil.



STANDARD  
WOODEN HANDLE  
ADAPTER

OPTIONAL STEEL  
HANDLE ADAPTER  
(180 / 270MM)

T000026



SEVERAL SIZES AVAILABLE

120 mm : T000070

180 mm : T000071

270 mm : T000072



AVAILABLE  
IN A DOUBLE VERSION

180 mm : T000073

270mm : T000074

# WHEEL WEEDER FOR MARKET GARDENING




USABLE WIDTH	80 / 120 / 180 / 270 mm
WHEEL	On bearings*
HEIGHT	4 adjustable positions
WEIGHT	From 7 to 12 kg
WARRANTY	1 year

\*except the 80mm model mounted on a nylon bearing


The tilling wheel for vegetable crops is a tool that originated from Flanders. This tool is composed of a wheel and a hoeing blade located at the rear. The wheel, mounted on bearings, presses down on the unwanted plants while the blade makes a clean cut well below the surface of the soil. The angle and height of the blade, made of hardened steel, are adjustable. Consequently, the tool can be adjusted to different types of soil and pedoclimatic conditions. The tool is used by pushing it forwards continuously. The handle can be adapted to the user by adjusting its angle. This makes it more comfortable when pushing the machine.



**PROTECTION SHIELD**  
120/180/270 MM  
T000090



**SINGLE WEED WEEDER**



**DOUBLE WEED WEEDER**

AVAILABLE IN A SINGLE OR DOUBLE VERSION

**SIMPLE :**

- 80 mm : T000088
- 120 mm : T000082
- 180 mm : T000084
- 270 mm : T000086

**DOUBLE :**

- 80 mm : T000094
- 120 mm : T000091
- 180 mm : T000092
- 270 mm : T000093



# HANDLE TOOL RANGE

 The whole range on our website



 terraviva\_agricoltura\_naturale | Italia

The Terrateck range of handle tools was designed to fulfil the expectations of businesses in the market gardening, park and recreation area sectors and local authorities. These lightweight, sturdy and high-quality tools are extremely comfortable for the operator during use. The great variety of tools allows the user to adapt to any situation. These tools, which are designed to last, have replaceable blades (on the oscillating stirrup hoes and hand hoes only)



- KIT INCLUDES:**
- 1X COLLET FOR WIRE WEEDER
  - 1X WIRE WEEDER 60MM BLADE
  - 1X WIRE WEEDER 90MM BLADE
  - 1X WIRE WEEDER 120MM BLADE

REFERENCE : T000181



**DELTA Δ WIRE WEEDER**  
 60 mm : T000179 / 90 mm : T000180  
 120 mm : T000178



**OMEGA Ω OSCILLATING**  
 60 mm : T000184 / 100 mm : T000183




**DELTA Δ OSCILLATING STIRRUP HOE**  
 90 mm : T000177 / 120 mm : T000175  
 200 mm : T000176



**HAND HOE REPLACEABLE BLADE (HEIGHT 40CM)**  
 120 mm : T000120 / 180 mm : T000122



**WIDE HAND HOE REPLACEABLE BLADE (HEIGHT 80CM)**  
 80 mm : T000124 / 120 mm : T000121  
 180 mm : T000123

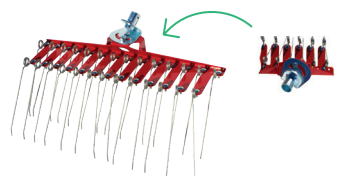

Adjustment of the offset working position and double row of springs

**TINE WEEDING RAKE AVAILABLE IN SEVERAL SIZES:**

- 15 cm : T000132 / 30 cm : T000133
- 60 cm : T000134 / 75 cm : T000135
- 120 cm : T000131

# HANDLE TOOL RANGE

 The whole range on our website



**MANUAL LEEK PLANTER**

3 TEETH (working width: 22cm) : N000669  
 4 TEETH (working width: 33cm) : N000670  
 5 TEETH (working width: 44cm) : N000671  
 8 TEETH (working width: 77cm) : N000672



**BROADFORK**  
T000166

460 mm ( 3 teeth spacing: 230mm)  
 Maximum planting depth: 200 mm  
 Non-adjustable planting: between 100 mm and 200 mm.



**STRAWBERRY PLANT PLANTING MACHINE**  
T000052



**MULTIPURPOSE SCRAPER**  
T000174



**HAND RIDGER**  
100mm : T000125  
200mm : T000126



**WALL FIXATION WITH HOOK FOR TOOLS**  
T000034



**PUSH ROLLER**  
Stable with water or sand  
50 cm : T000075  
75 cm : T000076  
80 cm :



**ROW MARKER**  
4 ROWS (700MM)  
T000188



**ROW MARKER PART XI**  
T000130

## TINE WEEDING RAKE

NEW



**PLANET WEEDEEER**  
80 mm : T000443  
120 mm : T000444  
180 mm : T000445



**DIAMON WEEDEEER**  
120 mm : T000440  
180 mm : T000442  
270 mm : T000441

This range of weeders uses a sharp blade used to "shave/cut" weeds on the surface. As with all weed control, the weed stage is critical. It is necessary to work on small "weeds" for speed of execution and ease of weeding. At the filament/cotyledon stage, weeds can be cut at the surface or just below and will not grow back. These weeders have the advantage of

cutting weeds without destroying the soil structure and do not stimulate the germination of buried weed seeds. They are mainly used on light soils. When you receive the blade, you will be able to sharpen it according to the work you wish to do.



**EC WEEDEEER**  
80 mm : T000437  
120 mm : T000438  
180 mm : T000439




**DELTA+ WEEDEEER**  
120 mm : T000446  
180 mm : T000447  
270 mm : T000448



The whole range on our website

# TORSION WEEDER

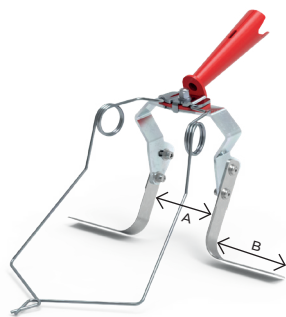

**SPACING BETWEEN THE BLADES (A):**  
90mm/120mm


**SPRING HOE**  
90 mm : T000186  
120 mm : T000185

<b>WIDTH OF THE BLADES (B)</b>	85mm (to be cut)
<b>SPACING BETWEEN THE BLADES (A)</b>	90mm / 120mm
<b>SET OF FINE SPRINGS</b>	Included
<b>SET OF HEAVY-DUTY SPRINGS</b>	Optional (T000187)
<b>HANDLE INCLUDED</b>	No
<b>WARRANTY</b>	1 year

The torsion springs, known for their effectiveness on large crops, have been fitted to a hand tool for weeding between rows as well as on the row.

It is an innovative tool that combines two hoeing techniques. Use on undeveloped weeds to achieve best results.

The adjustable torsion springs must be naturally closed. When you get to the plant, they open and close naturally to let the crop pass through. This means that, when closed, the springs do the weeding and as the plant passes through, they open and the plant is not injured.

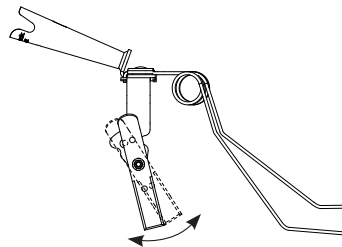

2 tilt settings and a working position of the springs only

# WOODEN HANDLES



**HANDLE  
(Ø30MM)**



**ASH HANDLE 27 CM  
T000153**

## ASH HANDLE (Ø29MM)



## ASH HANDLE WITH T-GRIP (Ø29MM)



## MULTI-PURPOSE HANDLE



WIDTH	32 cm
HEIGHT	95 cm
WEIGHT	1,4 kg
WARRANTY	1 year

The universal handle is used to manually complete your planting operations and maintain parks and recreation areas. This handle is designed for a wide range of high-performance accessories developed by Terrateck, making it extremely versatile. Thanks to this economic interchangeable system, there is no need to buy one handle for each tool. Time-saving, space-saving and finally money-saving.



**AUGER**  
120 mm : N000879  
150 mm : N000880



**MULTI-PURPOSE HANDLE T**  
T000154



**RANGE OF NURSERY TRANSPLANTERS**  
(Height 16 cm)

Ø7.5-11 CM : T000163 - Ø9.5-14 CM : T000162  
Ø11-16 CM : T000161 - Ø13-18 CM : T000164  
Ø15-20 CM : T000165



**RANGE OF BAMBOO TRANSPLANTERS**  
(Height 20 cm)

Ø8 MM : T000160 - Ø12 MM : T000155  
Ø16 MM : T000156 - Ø20 MM : T000157  
Ø25 MM : T000158 - Ø30 MM : T000159



**EDGING KNIFE**  
(Height 8cm - Width 16 cm)  
T000127

## SHRUB PULLER & MANUAL STAKE PULLER



JAW OPENING WIDTH	10 mm to 80 mm
ADJUSTMENT	3 positions
WEIGHT	6 kg
WARRANTY	1 year

The Terrateck shrub puller is a manual tool for businesses in the park and recreation area, farming and gardening sectors. It can be used to pull out shrubs (small trees) quickly and ergonomically. Indeed, the trunk of the shrub is held at the base between the tool's two jaws. The operator then has a lever arm of 1.3 m to uproot small trees. You will no longer need a pick or spade when uprooting shrubs. Furthermore, given the relatively small size of this tool, it can be used anywhere. You will be able to use it in relatively inaccessible areas such as: hedges, flower beds, etc.

Basically, you have three positions for the opening of the jaw. The shrub puller can be used to easily uproot shrubs ranging from 1 to 4 cm in diameter, depending on the variety and terrain type.



**MANUAL SHRUB PULLER**  
T000051 (standard model)  
T000065 (reinforced model)



**MANUAL STAKE PULLER  
(COMES WITHOUT CLAMPS)**  
T000027



**JAW Ø80/120MM**  
Ø 0-80 mm: T000029  
Ø 80-120 mm: T000028



**STABILISER FOR SHRUB PULLER  
(IDEAL FOR SOFT GROUND)**  
T000095

## POST RAMMER



The post rammer is a tool for easily and quickly driving your wooden stakes/posts into the ground. It works by inserting the stake into the body of the rammer and hitting the head of the stake by hammering downwards while holding the two handles. There are many benefits to using the post rammer: the operator can work alone, the driving force is even and always well-placed and it prevents the stake from splitting. The post is hit squarely, i.e. not at an angle, and there is no risk of the user injuring himself. There are two versions of the post rammer: Ø130mm and Ø160mm. Our models have a fitting to take a shock absorber that is fastened on top of the rammer head. This shock absorber is made of a material that has been specially developed by our engineering office to drive a stake into the ground while minimising the noise levels and the rebound effect.

### MINI-RAMMER RANGE (DELIVERED WITH SHOCK ABSORBER)



**BAMBOO DRIVER**  
50 mm: T000064

**STAKE/POST RAMMER**  
100 mm: T000063  
130 mm: T000062

### MAXI-RAMMER RANGE (DELIVERED WITHOUT SHOCK ABSORBER)



**POST RAMMER**  
130 mm: T000060  
160 mm: T000061



**SHOCK ABSORBER PPS160-PPS130**  
T000023

# JAB PLANTER




WIDTH (SQUARE)	30, 50, 80, 110 mm
HEIGHT	1 000 mm (PL1), 940 mm (PL2+)
WEIGHT	3 kg (PL1), 5kg (PL1+/PL2) / 8,6 kg(PL2+)
WARRANTY	1 year
DISTANCE MARKER INCLUDED (PL1)	

The Terrateck planters are hand tools that can be used to plant large seeds (beans, peas, corn, etc.) or plant transplants/shrubs. They are designed to facilitate the operator's work and are used to sow seeds and plant transplants without having to be in an unnatural position. The planters are ideal for transplanting on plastic mulch films. With its cutting edge, the mouth of the planter makes a clean cut in the film and easily breaks through the soil in which it drops the seeds and the the transplants. The mouth is opened using a handle (PL1) or a pedal (PL2 and PL2+) mounted on a spring to release the seeds/plant. With the PL1, there is the option to adjust the seeding depth using a depth gauge. An adjustable guide is used to sow the seeds at a regular distance from each other.


PL1




PL1+



PL2



PL2+



PL1 JAB PLANTER  
T000053



PL1+ PLANTING STICK  
T000054



PL2 JAB PLANTER  
T000055



PL2+ JAP PLANTER (SHRUBS)  
T000056

## MICROBULB TRANSPLANTER



**MICROBULB  
TRANSPLANTER**  
T000057

NUMBER OF ROWS	1
CAPACITY OF THE HOPPER	9 liters
MINIMUM DISTANCE BETWEEN BULBS	4 cm
MAXIMUM DISTANCE BETWEEN BULBS	19 cm
PLANTING SPEED	3 à 5 km/h
WEIGHT	28 kg
WARRANTY	1 year



The single-row small bulb planter is a wheeled manual tool used to transplant small onion bulbs and cloves of garlic (transplanting garlic depending on the size of the latter). Designed to make the operator's work easier, this single-row planting machine mechanises the transplantation process using its distribution system with a rotating tray, which until now had been a manual task on small farms with diversified vegetable crops. This planting machine is easy to use and can be adjusted in a few minutes. You can easily manage the height of the handles, the plant density per metre, the planting depth, empty the tilting hopper, disconnect the planting system and adjust the guide for the following row. These are just some of the smart features that you will appreciate in use.

# PAPERPOT TRANSPLANTER



LENGTH	1,70 m
WIDTH	35 cm
DEPTH	Adjustable
TRANSPLANTING	264 transplants in 40 seconds
WEIGHT	21 kg
WARRANTY	1 year

The Paperpot transplanting system is a machine that is known and recognised in Japan and the USA for simplifying the transplantation process. The seedlings are prepared in slabs of paper cells that are linked to each other. The transplantation process is done quickly by simply «unravelling» the chain of transplants into the soil. After the harvest, the paper decomposes in the soil so that it is ready for the following crop. Transplantation must be carried out using the special cell system that is compatible with this equipment.

## INCLUDED IN THE STARTER SET




TRANSPLANTER PL4  
T000114



NURSERY FLAT X25  
T000102



SPREADER BARS  
T000103



SPREADER FRAME  
T000104



## ONE DROP SEEDER PAPERPOT

(several sizes available)

SS Ø2,8MM : T000101


S Ø3,2MM : T000100

M Ø3,5MM : T000099

L Ø4,5MM : T000097

LL Ø6MM : T000098


## THE TYPES OF PAPER CHAIN POT



PAPER CHAIN POT 264-5-31  
LENGTH 14M - 5CM  
Individually : N000768  
Box x150 : N000769



PAPER CHAIN POT 264-10-31  
LENGTH 27M - 10CM  
Individually : N000764  
Box x75 : N000765




PAPER CHAIN POT 264-15-31  
LENGTH 40M - 15CM  
Individually : N000766  
Box x75 : N000767

# PAPERPOT TRANSPLANTER

 The whole range on our website

## THE STEPS

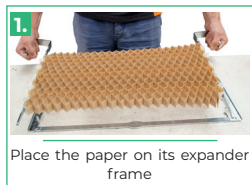


1. Place the paper on its expander frame



2. Place the paper cells in the seeding tray



3. Filled with soil

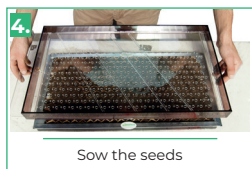

4. Sow the seeds



5. Leave to grow prior to transplanting



## ADD-ON ACCESSORIES




SEEDER PLATE (264 PLANTS)

XS Ø2,8MM: T000111  
S Ø3,2MM: T000108 / M Ø3,5MM: T000107  
L Ø4,5MM: T000106 / XL Ø6MM: TT000105



TRAY SEEDER BY ITSELF  
(DELIVERED WITHOUT PLATE)  
T000096



DIBBLER FOR CHAIN POTS  
T000113



RIDGER FOR SANDY SOIL  
T000115



NEXT ROW MARKER  
T000112




UNDER SEED TRAY SET OF  
25 - SAUCER FOR 60X30X3CM  
TRAYS  
T000451



OUR SEED BOXES ARE DESIGNED  
FOR GROWING MICROGREENS  
T000102

# MANUAL SEEDER FOR CELL PLANTER TRAYS

NEW

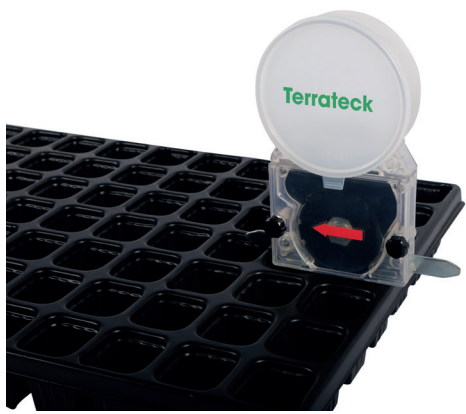

Your sowing of cell plugs flats has never been easier than with the G8 manual seeder. Quick, efficient and precise, you carry out your seeding operations by simply sliding the seeder on each row of cells of your trays. Bucket after bucket, this seeder distribute precisely one seed after another. This manual seeder ensures a rotary distribution of one seed at a time by cell (or bucket). It comes with 4 different discs to adapt to the size of the seed. It is important to specify that the seeds must be coated / pellet (round) in order to have optimal operation of the seeder.



	G8 TYPE	G12 TYPE
Distribution	Rotating disc	
Disc delivered	XS - S - L - XL	
Weight	176 gr	
Production capacity	30 seconds for 128 plants	1 minute for 288 plants
For plate	128 to 220 pots	288 to 448 pots
Product references	N000854	N000855

# MULTIPLE ROW SEEDER FOR RADISH AND SPINACH



**MULTIPLE ROW SEEDER**  
T000058



**RULER FOR MULTIPLE-ROW SPREADER**  
T000059

<b>NUMBER OF ROWS</b>	From 1 to 12
<b>TANK</b>	Independant hopper
<b>MINIMUM DISTANCE BETWEEN ROWS</b>	5 cm
<b>MAXIMUM DISTANCE BETWEEN ROWS</b>	70 cm
<b>PLANTING SPEED</b>	1 to 3 km/h
<b>WEIGHT</b>	34 kg
<b>WARRANTY</b>	1 year



**RADISH SEEDLINGS AT 6 DAYS**

The 12-row garden seeder is designed for diversified market gardening operations. A central rotating axle feeds the seed to a perforated disk which frees the seeds one by one. The sowing density is proportional to the forward motion and adjustable with different pinions.

This seeder is perfectly suited to sowing rocket, radishes, spinach, and lamb's lettuce.

Easy to use, this seeder can be adjusted in a few minutes. As a general rule, the sowing depth can be adjusted for all the base plates.

With a width of 75cm, you can plant from one to 12 rows as necessary by changing the perforated disks.

The front cage roller will break up clumps of dirt and the full roller at back will properly press the seeds into the ground.

# PROFESSIONAL MANUAL SEEDER



**SPECIALIST SINGLE-ROW VERSION**  
N000153

**SOLD WITHOUT DISCS**  
**(DEPENDING ON VERSION)**

LENGTH	140 cm
WIDTH	23 cm
HEIGHT	103 cm
WEIGHT	23 kg

The EBRA seeder is a single-row mechanical push seeder. It is simple, robust and versatile, and is perfect for the farming of diversified vegetable crops. Thanks to its two large diameter wheels, it rolls over the earth smoothly and does not pack it down as much. There is a range of

seed discs for precisely sowing all types of seeds. The many adjustment options of the drive system (19 positions) make it possible to always sow the seeds at regular intervals according to the forward motion.

	A RANGE ADAPTED TO EVERY NEED		
	SJ ESSENTIEL	SJ DYNAMIC	SJ EXPERT
Sowing depth and indicator		●	●
Next row marker		●	●
Adjustment chart		●	●
Disk rack			●
Plate for hopper decrease			●
Rear wheel scraper			●
Tool box			●
Reference	N000152	N000151	N000153

# EBRA MARKET GARDENING SEEDER

 The whole range on our website



**BEETS**  
N000138



**PEAS**  
N000140



**SUNFLOWERS**  
N000134



**BEANS**  
(small calibre)  
N000136



**BEANS**  
(large calibre)  
N000150



**BULBS**  
N000137



**PARSNIP**  
N000142



**BEAN**  
N000148



**SALAD  
LETTUCE  
LEEK**  
N000144



**RADISHES  
SPINACH  
LAMB'S LETTUCE**  
N000147



**SQUASH  
COURGETTE  
MELON**  
N000141



**CARROTS  
TURNIPS  
CELERY  
BLACK RADISH**  
N000145



**CORN**  
N000871

OTHER DISCS AVAILABLE	
Cucumber, watermelon, rice	N000870
Big peas diameter	N000872
Coated seed 2.25/2.75 - 2.5/3	N000873
Coated seed 3.25/3.75	N000874
Soy	N000875
Basil, endive	N000876
Groundnuts/Peanuts	N000877



**REAR RUBBER WHEEL ONLY  
FOR THE EBRA SEEDER**  
N000867



**NEXT ROW MARKER  
FOR THE SJ ESSENTIEL**  
N000869



**NOTCHED WHEEL SIDE-PIECE  
FOR THE EBRA SEEDER**  
N000878

OTHER OPTIONS AVAILABLE	
Support wheel for the EBRA seeder	N000868
Split seed bundle for EBRA expert/dynamic/essential seed drill	N000856

# MANUAL MARKET GARDEN SEEDER

**NEW**



**MANUAL SEEDER JP1**  
1 row : N000886



**MANUAL SEEDER JP3**  
2 rows : N000887 - 3 rows : N000888  
4 rows : N000889 - 5 rows : N000893



**MANUAL SEEDER JP3 REINFORCED**  
2 rows : N000890 - 3 rows : N000891  
4 rows : N000892

Designed by field engineers for sowing areas of up to 12 acres of vegetables per day, the Terradonis seeders have started a revolution in sowing operations for vegetable and flower crops. These user-friendly and easily adjustable seeders are based on a very precise seed selection system and are available in 1, 3 or 6-row versions. The hopper can be removed thanks to a

simplified system making it easier to clean and change the roll. The adjustment of the sowing distance is managed by 6 seed metering wheels which are fitted to the drive chain offering 11 seeding combinations for the precise adjustment of the seed spacing.

## CHARACTERISTICS OF SEEDERS

WEIGHT	9kg
DISTANCE ON SOWING ROW	Adjustable except for 7 rows
SEEDLING	In a row or a pocket
ROLLERS	Anti-static
HOPPER	Transparent or removable
SOWING DEPTH	Adjustable
SWEEPING	Adjustable



**MANUAL SEEDER JP6**  
5 rows : N000894 - 6 rows : N000895  
7 rows : N000896

 The whole range on our website

ROLLER	REFERENCE	CROP	CAN BE USED WITH THE DOUBLE ROW PLOUGH
A-6	N000897	Coconut beans, Sweet corn, Barley, Rice and Rye	no
AA-6	N000898	Coconut beans, Sweet corn and Rye	no
C-6	N000899	Fodder beet and Sunflower	no
FJ-12	N000900	Rapeseed, Spinach, Mustard, Lamb's lettuce, Watermelon, Radish	no
FJ-24	N000901	Rapeseed, Spinach, Mustard, Lamb's lettuce, Radish	yes
FJ-30	N000902	Spinach, Mustard, Lamb's lettuce, Radish	yes
FJ-36	N000903	Spinach, Lamb's lettuce, Radish	yes
J1-6	N000904	Ingot bean, Green beans and Melon	no
J3-6	N000905	Ingot bean, Green beans (small seeds)	no
J5-6	N000906	Ingot bean, Green beans (large seeds)	no
L-12	N000907	Lentils and parsnip (low density)	no
L-24	N000908	Lentils and parsnip (high density)	yes
LJ-12	N000909	Swiss chard, Chard, Sea beet and Okra	no
M-2	N000910	Chili, Pepper and Sorghum	no
MJ-12	N000911	Beetroot and Coriander	yes
MJ-6	N000912	Lettuce (coated)	no
N-6	N000913	Oats, Wheat, Barley, Mangetout, Soybeans	no
X-12	N000914	Watercress, Fennel, Millet, Onion (bare seeds), Rocket and Sage	no
X-2	N000915	Millet, Sage, Tomato	no
X-24	N000916	Watercress, Millet, Onion (bare seeds) and Sage	yes
X-30	N000917	Onions - bare seeds (low density)	yes
X-36	N000918	Onions - bare seeds (high density)	yes
XY-12	N000919	Chicory and Lettuce (bare seeds)	no
XY-24	N000920	Carrots- large seeds (low density)	yes
XY-30	N000921	Carrots- large seeds (high density)	yes
XYX-24	N000922	Carrots- large seeds (low density)	yes
XXX-6	N000923	Dill, Chicory, Lettuce (bare seeds)	no
Y-12	N000924	Chives, Flax and Leek	no
Y-2	N000925	Aubergine	no
Y-24	N000926	Chives, Flax and Leek	yes
YX-12	N000927	Basil, Celery, Lucerne, Turnip, Black radish, Rosemary and Savory	no
YX-2	N000928	Rosemary and Savory	no
YYJ-12	N000929	Parsley (low density)	no
YYJ-24	N000930	Parsley (high density)	yes
YYJ-6	N000931	Broccoli, Cabbage, Chinese Cabbage Pak Choi, Kale and Rutabaga	no
YYX-12	N000932	Chamomile, Lavender, Mint, Sorrel and Thyme (low density)	no
YYX-24	N000933	Chamomile, Lavender, Mint, Sorrel and Thyme (high density)	yes
Z	N000934	Custom roller for all crops	

## MANUAL MULCH LAYER



ROLL WIDTH	90 to 160 cm
HANDLE	Height adjustable
ROLLER	Spring-mounted bobbins
SHEET TENSION	Tilting wheels
SWEEPING	Adjustable discs
WEIGHT	44 kg
WARRANTY	1 year

The manual plastic/biodegradable mulch laying machine is a tool that makes laying plastic mulch on the soil easier and faster. This fully adjustable laying mulch machine can take rolls between 90 and 160 cm wide. The layer must be operated by two operators who pull the layer along. The furrower at the front of the machine cuts open the soil and digs the furrow, the roll of plastic mulch is unwound, laid and stretched across the base of the furrow by the wheels. The parabolic discs at the rear of the machine sweep soil over the edges of the sheet. The drip irrigation holder unwinds the hose as the plastic mulch is laid. This machine is perfect for working in a greenhouse or an open field.



T000035



DRIP IRRIGATION  
T000036



HANDLING WHEEL  
T000038



TWO-WHEEL ADAPTER  
T000022

## SEEDBED ROLLER



**WIDTH** 90cm or 120 cm

**ROLLER DIAMETER** 400 mm

**WEIGHT** 39 kg

**SUPPLIED WITHOUT DIBBLES**

**THE FRAME IS WIDE ENOUGH TO TAKE A BREEZEBLOCK**

**DIAMETER MESH** 40x40 Ø thread = 4 mm

The seedbed roller with dibbles is an essential tool for farms with diversified vegetable crops. It can be used for carrying out a variety of operations: preparing the seedbed (the cage roller breaks up clods), marking out a regular interval for the transplanting pots and making holes in the plastic mulch. Given that the roller is made of wire mesh, the different V-shaped dibbles can be easily clipped on using multigrip pliers so that you can mark out the ground and make holes in the plastic mulch laid out beforehand.

When the earth is heavy or the mulch is thick, up to three standard breeze blocks can be loaded onto the frame of the seedbed roller to make the entire system heavier.




**TWO SIZES AVAILABLE**  
90cm : T000081  
120cm : T000080

### THE OPTIONS



**PERFORATOR FOR SEEDING**  
Ø20MM H 50MM  
(MULCHING)  
T000078



**DIBBLE X20 H 60MM**  
T000079

**DIBBLE X20 H 100MM**  
(MULCHING)  
T000077

# PLASTIC HOLE BURNER



HEIGHT	90 cm
WEIGHT	1,6 kg
WARANTY	1 year (excluding Piezzo)
GAS CONSUMPTION	250 ml/ hour
GAS	Propane/Butane

The Access - BA burner is a thermal weeder that weeds a limited area using fire. When combined with the Thermoperfo - TP, this torch can be converted into a plastic or woven mulch hole burner. The base of the Thermoperfo - TP, on which various types of cups are retained with a spring-loaded screw, is fastened to the head of the blow torch.



**ROUND CUP**  
 Ø40 mm : T000287  
 Ø60 mm : T000288



**REVERSIBLE ROUND CUP**  
 Ø80 mm : T000289  
 Ø114 mm : T000283




**STAR CUP**  
 Ø130 mm : T000281



**SQUARE CUP**  
 Ø40 mm : T000280



**CUTTER PIN**  
 T000290

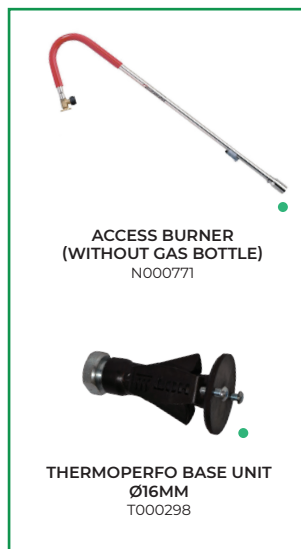

**ACCESS BURNER  
 (WITHOUT GAS BOTTLE)**  
 N000771

**THERMOPERFO BASE UNIT**  
 Ø16MM  
 T000298

## THE OPTIONS



**DISTANCE MARKER**  
 T000276



**OPERCULUM PICKER WITH HANDLE (SOLD WITHOUT HANDLE)**  
 T000293



**GAS BOTTLE PACKAGED INDIVIDUALLY IN BATCHES OF 24 OR 96**  
 N000773



**PIEZO IGNITER (SPARE)**  
 (wear part not guaranteed)  
 T000279

The products with a green dot (•) are compatible with the vegetable crop mulcher perforator only.

# PLASTIC MULCH HOLE BURNER



**ACCESS BURNERS**  
T000277  
**+ NURSERY BASE**  
**(WITHOUT GAS BOTTLE)**  
T000299



**OPERCULUM PICKER WITH HANDLE**  
**(SOLD WITHOUT HANDLE)**  
T000278  
(wear part not guaranteed)

HEIGHT	95 cm
WEIGHT	2,7 kg
WARRANTY	1 year (excluding Piezzo)
GAS	Propane/Butane
<b>USABLE FOR THERMAL WEEDING</b>	



**OPERCULUM PICKER WITH HANDLE**  
**(SOLD WITHOUT HANDLE)**  
T000293



**BOTTLE CARRIER CAMPINGGAZ**  
**(TAP INCLUDED)**  
T000292



**REFILLABLE CAMPINGGAZ BOTTLE 3KG**  
**(NOT RETURNABLE)**  
N000772



**STAR CUP Ø200MM**  
T000282



**ROUND CUP Ø210 MM - 2 L**  
T000286



**REVERSIBLE ROUND CUP**  
Ø150 mm - 1 L : T000284  
Ø170 mm - 1,5 L : T000285

## ROTO-PERFO PERFORATOR



<b>MINIMUM ROTATION SPEED</b>	800 revolutions / minutes
<b>PERFORATION</b>	All types of natural mulching
<b>PERFORATOR</b>	Sold without the cup
<b>SCREW GUN</b>	Not supplied

The roto-perfo natural perforator makes it possible to make holes in hemp, coco, jute, or sheep's wool mulching by mechanical means.

This mulching perforator is activated with a commercial screw-gun which ensures the rotation of a cup that cuts the mulching by friction. It makes it possible to have a precise and neat cut in the canvas, to work at eye level, and to have high work output. The perforator pad makes it possible to have great precision as to the perforation placement. As for the perforator head, it is spring-mounted to guarantee the user/operator ergonomic comfort.

The cup is available in two diameters: 80mm and 114mm depending on the crop to transplant. The domes are sold singly.



**ROTO-PERFO PERFORATOR FOR NATURAL MULCHING**  
T000294



**PLANTING BLADE**  
T000291



**FRICTION CUP**  
Ø80 mm : T000296  
Ø114 mm : T000295




**AVAILABLE IN A KIT WHICH INCLUDES:**

- DeWalt 18V screw-gun
- perforator for natural mulching
- Cup Ø80mm
- Cup Ø114mm


Reference : T000297

# FLAME WEEDER FARMERS FRIEND

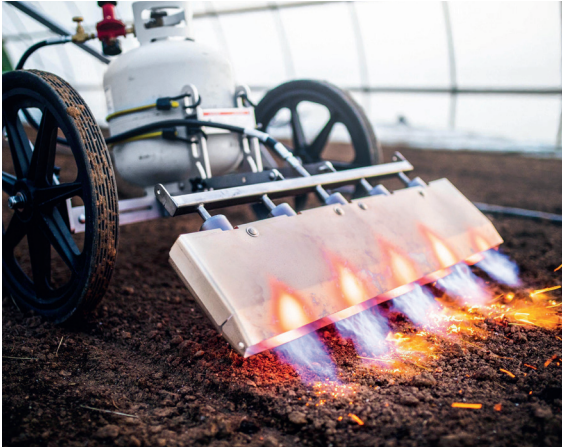

WORKING WIDTH	80 cm - 120 cm
AMOUNT OF BURNERS	5 - 8
MATERIALS	Stainless steel/ Aluminium
GAS	Propane

Terrateck is the exclusive importer of the Farmers Friend equipment, offering you high quality flame weeder for professional purposes, using gas bottles of 5-13kg, you can insure the weeding by thermal shock before seeding on your beds. The height of the burners and of the handles are adjustable, to be adapted to you beds and your morphology. The offset handles allow working in good conditions without walking on the beds, the track width is also adjustable and it exists in the width 80cm and 120cm.

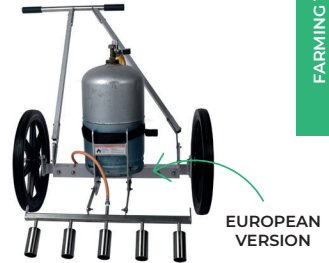

## FLAME WEEDER FARMERS FRIEND

Size 80 cm : N000173  
Size 120 cm : N000174



## SHELTER FOR FLAME WEEDER

Size 80 cm : N000175  
Size 120 cm : N000176



# TERRATECK PROFESSIONAL THERMAL WEED KILLER



**NEW**

DISC DIAMETER	350 mm
POWER	(thermal effect kW) 86
HOSE LENGTH	1.5 m
REGULATOR	Not necessary except for specific bottle (see adapters)
CONNECTION	Control valve with Shell swivel fitting connection
GAS CONSUMPTION G/H	(at 4 Bars) 6700
GAS TYPE	Propane
BURNER DIAMETER	50 mm (Made of top-quality brass)
DISC SPACING	Minimum 150 mm Maxi 350 mm

The TERRATECK precision thermal weeder controls weeds using a naked flame that eliminates the weeds without the need for chemicals.

TERRATECK has developed a frame-mounted assembly for precise and ergonomic weeding between rows without burning the crop in place.

Given its two adjustable discs (From 125mm to

350mm), you can perfectly adjust the weeding width to match the width of your inter-rows. The thermal weeder has a trigger that activates the "booster" during weeding operations and puts the weeder on standby while moving from one strip to the next.

It is generally used with a 5kg bottle in a backpack or a 13kg bottle on a trolley.

 The whole range on our website



**PRECISION THERMAL DISC WEEDER**  
T000415



**BACKPACK FOR 3 AND 5KG GAS BOTTLES**  
T000119



**13KG AND 6KG GAS BOTTLE TROLLEY**  
T000416

# TERRATECK PROFESSIONAL THERMAL WEED KILLER



**MANUAL FLAME WEEDER**  
N000762



**3-NOZZLE MANUAL  
THERMAL WEEDER**  
N000861



**4-NOZZLE MANUAL  
THERMAL WEEDER**  
N000862

This professional thermal weeder with a pilot-light handle can be used directly with the bottle with no regulator on a butane bottle, or on propane with a regulator (sold as an option).

	1-NOZZLE MANUAL THERMAL WEEDER	3-NOZZLE MANUAL THERMAL WEEDER	4-NOZZLE MANUAL THERMAL WEEDER
Lance	800 mm	600 mm	600 mm
Bank	1 buse Ø60mm	3 nozzles (Ø45mm)	4 nozzles (Ø45mm)
Supplied	5m de tuyau	5m of hose	5m of hose
Working width	30 cm	70cm	80cm
Maximum temperature	1800°C	1800°C	1800°C
Regulator	Included	Sold as an option	Sold as an option

# HARVEST BAG



ADJUSTMENT	Varies depending on the operator
HEIGHT	60cm (front) / 30cm (side)
DIAMETER	35cm (front) / 25cm (side)
SIZE	One-size

The Terrateck harvest bags make it possible to harvest fruit and vegetable crops. They allow operators free use of their hands. The harvest bags bring the user ergonomic comfort and productivity as the load is spread evenly across the shoulders and filling vegetables at waist level or at the sides limits bending and stretching movements. The trick to this bag is the possibility of emptying the fruits and vegetables by unhooking the lower portion of the previously folded bag to transfer into crates. As a result, no time is lost, and work is always done using a proper ergonomic position. These bags are one-size and adjustable to adapt to the carrier.



**FRONT HARVEST BAG**  
(HARVEST SIZE: 58L)  
T000302

Load spread across the shoulders



**SIDE HARVEST BAG**  
(HARVEST SIZE: 12L)  
T000301



**ADDITIONAL BACK POCKET FOR SIDE BAG (12L)**  
T000368




**BELT BAG MULTI-PURPOSE**  
T000393

# CRATE HOLDER FOR HARVESTING AND PLANTING



**HARNESS FOR FRONT TRAY HOLDER**  
T000394

This ergonomic crate holder makes harvesting more comfortable. It is perfectly suited to small, fragile fruits (raspberries, blackberries, blackcurrants, etc.) as well as tree crops (peaches, apricots, etc.) You place your crate directly on the front holder which holds the crate firmly in place. This prevents any knocks to your harvest while also being ergonomic. This crate carrier consists of two removable frames (sold separately) for 60x40cm or 40x30cm crates.



**FRAME FOR TRAY HOLDER**  
40X30 cm: T000396  
60X40 cm: T000395



**SINGLE-WHEEL PLANTING TROLLEY FOR 60X40 CRATES**  
T000397



**ALL-TERRAIN HARVESTING TROLLEY FOR 60X40 CRATES**  
T000398



# PICKING

 The whole range on our website



**GACHAINMAIL GLOVES  
(RIGHT OR LEFT HANDED)**  
Size 7 : N000169 - Size 8 : N000170  
Size 9 : N000171 - Size 10 : N000172



**HARVESTING LETTUCE  
11CM SERRATED BLADE**  
N000177



**WEEDER 6CM SERRATED  
HAWKBILL BLADE**  
N000178



**CELERY DEBEARDER  
12.5CM BLADE**  
N000181



**HARVESTING CHARD, CELERY  
18CM SERRATED BLADE**  
N000179



**HARVESTING FENNEL  
21CM BLADE**  
N000180



**HARVESTING CABBAGE  
30CM BLADE**  
N000182



**CABBAGE KNIFE  
BLADE 32 CM**  
N000183



**WHITE ASPARAGUS GOUGE**  
Right: N000166  
Left: N000167



**CLETTUCE KNIVES**  
Right: N000164  
Left: N000165



**GREEN ASPARAGUS  
KNIFE**  
N000168



**HANDED HARVESTER**  
Right: T000067  
Left: T000068



**HARVEST CLIPPERS**  
Straight: N000881  
Curved: N000882










# PICKING

 The whole range on our website



## FLEXIBLE 38L HARVEST BASKET






DIAMETER	CONTENT	HEIGHT	WEIGHT
45 cm	38L	33 cm	0.9 kg

COLOUR	REFERENCES	COLOUR	REFERENCES
	N000689		N000690
	N000688		N000694
	N000693		N000691
	N000696		N000695
	N000692		



## FLEXIBLE 75L HARVEST BASKET

DIAMETER	CONTENT	HEIGHT	WEIGHT
57 cm	75L	37 cm	2,1 kg

COLOUR	REFERENCES	COLOUR	REFERENCES
	N000698		N000699
	N000701		N000700
	N000697		



## BASKET DRAINER 12L

REFERENCE	CONTENT	DIAMETER	HEIGHT
N000687	12L	34 cm	20 cm



**SALAD SPINNER - BIG CAPACITY**  
 10L : N000131  
 20 L : N000132



**ELECTRIC SALAD SPIN-DRYER + CRADLE + TIMER**  
 20 L : N000980



**SALAD SPINNER - BIG CAPACITY 20L HERMETIC**  
 N000133

# HARVESTER FOR BABYLEAF, AROMATIC PLANTS



90 cm : T000203  
 120 cm : T000190  
 150 cm : T000191  
 170 cm : T000192

<b>CUTTING WIDTH</b>	90 / 120 / 150 / 170 cm
<b>LENGTH</b>	2 m
<b>TRACK WIDTH</b>	120 / 150 / 170 / 200 cm
<b>WORKING HEIGHT</b>	1,15 m (adjustable)
<b>BATTERY LIFE</b> *Variable depending on the crop and model	4 hours of harvesting*
<b>HARVEST</b>	In bags or in crates
<b>WEIGHT</b>	165 kg to 200 kg
<b>NUMEROUS OPTIONS AVAILABLE</b>	

## THE STRENGTHS

- > Electric Reaper
- > 4 sizes available
- > Harvest capacity 2T/day
- > Electric Forward motion
- > Speed control box



**ANTI-ROLL TARP**  
T000230

The Terrateck baby leaf harvester was designed for the daily picking of crops of lettuce, green salad, purslane, spinach, aromatic plants etc. The 120 cm-wide cutter bar cuts the vegetation cleanly and precisely. The saw, reel, and belt are adjustable depending on the plant height, the bed height, and the desired cutting height. This picker is popular because it is simple to use, ergonomic and allows you to quickly complete your work. A 60 metre bed can be harvested and crated in 12 minutes. You harvest in total autonomy for your daily needs and without fatigue.

# OPTIONS, ACCESSORIES AND SPARE PARTS FOR HARVESTERS



**STANDARD HARVEST BAG**  
T000224



**WIDE MESH HARVEST BAG (10MM)**  
T000229



**BAG WITH SIDE SPOUT**  
T000225



**ADDITIONAL BATTERY PACK**  
T000216




**BATTERY CHARGER**  
220V(EU) : T000208  
110V(US) : T000209



**SPARE REEL**  
T000218



**DIVIDER-RAISER KIT**  
T000223



**RUBBER WIPERS KIT**  
T000204

	90 CM : T000203	120 CM : T000190	150 CM : T000191	170 CM : T000192
Support wheel for raised beds	T000221	T000218	T000219	T000220
Electric support wheel for raised beds	T000428	T000429	T000430	T000431
Cutterbar and exchangeable gearbox - Fully fitted	T000420	T000456	T000421	T000422
Top and bottom cutterbar - incl. hardware	T000423	T000424	T000425	T000426
Rear axle beam	T000432	T000433	T000434	T000435
Remote control	T000436			

## MINI-BABYLEAF HARVESTER



THE OPTIONS



AVAILABLE IN A KIT  
DEWALT 18V DRILL / SCREW GUN  
+ HARVESTER  
T000201



80M PICKING BOX HOLDER  
T000202

CUTTING WIDTH 80 mm

CENTRE PATH / WHEEL CENTRE 97cm/65cm (rear only)

HARVEST CAPACITY 160 kg / hour

OPTIMAL SCREW-GUN  
ROTATIONAL SPEED 1 300 revolutions / minutes

AUTONOMIE BATTERIE 6A 20mn of harvesting

SPEED OF MANUAL PROGRESS

REAPER TRACTION / CONVEYOR / SCREW-GUN CUTTING  
(NOT SUPPLIED)

The Terrateck mini-babyleaf harvester / mesclun harvester makes it possible to efficiently mechanise the daily harvesting of fresh herbs destined to direct sales.

Based on our RJP1200 harvester, this equipment was simplified in order to offer a harvester adapted in terms of size and price. This harvester's complete loop is done with a drill / screw gun which ensures the operation of the blade, reaper, and conveyor belt.

Lightweight and easy to manage, this mini-harvester will allow you to harvest all salads to

be cut, spinach, mesclun, purslane, etc.

All of the mechanisms for cutting height, reel, and belt are adjustable to the crop's evolution and production. The mount on a 4-wheel chassis makes for homogenous cutting and working in an ergonomic manner.

To use this harvester, you'll favour the use of a high-quality screw gun / drill. We recommend the 3-speed DEWALT DCD996P2-QW. The optimal rotation speed on the primary loop axis is 1300t/min.

# FARMERS FRIEND HARVESTER



**FARMERS FRIEND HARVESTER**  
N000711

CUTTING WIDTH	40 cm
PICK-UP REEL AND SAW	By screwdriver (not supplied)
WORKING SPEED	According to the vegetation and operator
WEIGHT	3 Kg
SCREWDRIVER PROVIDED	No



**QUICK STAND - QUICK CUT HARVESTER FARMERS FRIEND**  
N000858

TERRATECK is the official distributor of Farmers Friend llc for France and certain European countries. Powered by a cordless drill/screwdriver, this harvester cuts the crop neatly and precisely with its serrated blade. This will give you the clean crop you need for a potential second cut. The pick-up reel made of macramé braided strings draws the cut leaves towards the basket located at the rear of the harvester. This harvester has a universal holder for most

drill/screwdrivers available on the market. TERRATECK recommends using machines with a minimum voltage of 18V in order to deliver adequate power and battery life. This device will improve your everyday productivity for harvesting babyleaf salads. With a throughput of 80kg/hour, this harvester makes a significant difference when compared to using a simple knife. The blade can be easily removed for sharpening, using the pin mechanism.



**PARTS KIT FOR HARVESTERS**  
N000712



**SPARE HARVESTER BLADE**  
Individually: N000859  
Set of 5 blades: N000713



**QUICK CUT HARVESTER BELT**  
(Individually)  
N000859

# CLEANING GUN




WEIGHT	0.45 kg
MAXIMUM PRESSURE	12 bars
FLOW RATE	50 L / minute
MAXIMUM TEMPERATURE	50 / 1180 °C

Originally, these cleaning guns were used in industry and in the agri-food sector for all types of cleaning processes. Given the very high standards of manufacturing, they are perfectly suited to cleaning your vegetables after harvesting and prior to packaging for sale. The gun is robust, lightweight and has an ergonomic design making it very pleasant to use. You will appreciate the controls that allow you to adjust the width and intensity of the water jet using a trigger. You no longer need to turn a flow rate dial in order to get the right setting.



**CLEANING GUN**  
N000128

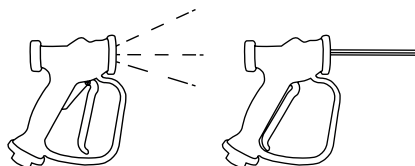

**POSSIBILITY TO ADJUST THE WIDTH AND INTENSITY OF THE JET**



**7-FUNCTION LOW PRESSURE GUN**  
N000118



## TERRATECK TIP



**MALE FITTING FOR CLEANING GUN**  
N000119



**AUTOMATIC QUICK CONNECTOR Ø19 - 6 BEARINGS**  
N000120

## REEL/UNWINDER FOR DRIP IRRIGATION HOSE



**REEL/UNWINDER  
FOR DRIP IRRIGATION HOSE**  
T00042

**DRUM DIAMETER** 570 ± 120 mm

**MOBILE TROLLEY MOUNTED ON PNEUMATIC WHEELS**

**FOR THE INSERTION OF RIGID  
AND FLEXIBLE TUBES** Up to 16 mm

**LOADING / UNLOADING OF THE REEL BETWEEN FLANGES**

**ADAPTIVE DRUM**

**LENGTH OF HOSE (WOUND)** In fonction of the tube diameter

**WEIGHT WITHOUT OPTIONS** 27.6 kg



**HOSE CLEANING BRUSH KIT**  
T000452

The Rewinder / Unwinder for drip irrigation allows reusing the tubes of T-Tape, polyethylene or PVC. The patented retractable drum system allows taking out the tube roll without deforming it. Therefore, you can store the rolls during the winter and use them for several years.

While unwinding the tubes, it is only necessary to place the roll on the drum, which will ensure the right tension with a spring. Therefore, the unwinding process is becoming easy. The trolley brings comfort to this working process and at the same time an optimisation to the storage.

Built on a transport trolley, it can be transport directly to the field

## WATERING AND IRRIGATING




The Terrateck range of irrigation reels is suitable for small-scale market gardening, horse riding schools and green spaces. Originally used in flower growing, they are perfectly suitable for the irrigation of your plots, greenhouses and open fields. The watering width and length are variable depending on the type of reel, so that you can tailor it to your crop strips.

Each reel is composed of a trolley on wheels which can be used to move the reel over uneven terrain. Once the sprinkler is unwound, the trolley is drawn towards the reel by the pressure of the water using a hydraulic turbine. This ensures that the water distribution is uniform and controlled. The high-performance turbine also works with special water or with fertilisation.



MANUAL TUBE ROLLER\*

50M-Ø19 MM  
N000708  
100M-Ø19 MM  
N000709  
150M-Ø19 MM  
N000710



AUTOMATIC HOSE REEL\*

15M-Ø19 MM :  
N000702  
25M-Ø19 MM :  
N000703  
40M-Ø19 MM :  
N000704



HOSE REEL  
MANUEL MURAL\*

50M-Ø19 MM :  
N000706  
100M-Ø19 MM :  
N000707




WATERING LANCE  
SOFT RAIN 60CM  
N000853



WATER NOZZLE ON  
TRIPOD  
N000126



WATER NOZZLE  
ON SLED  
N000127



WALL BRACKET FOR ME-  
TAL GARDEN HOSE  
N000857

\*Delivered without tube

## 20 / 40M IRRIGATION REEL




**IRRIGATION REEL 20/40M**  
N000676

WORKING WIDTH	20 m
HOSE LENGTH	40 m
WINDING SPEED	8 - 20 m/h
WEIGHT	35 kg

PIPE DIAMETER	INPUT PRESSURE	OUTPUT PRESSURE	RANGE	FLOW RATE		SURFACE WATERED	RAIN GAUGE
MM	BAR	BAR	M	L/MIN	M <sup>3</sup> /H	M <sup>2</sup>	MM/H
4	2,5	1,5	10	9	0,55	800	1,75
	3	2	11	10,8	0,64	880	1,70
	3,5	2,5	12	12	0,71	960	1,57
	4	3	12,5	13,2	0,78	1000	1,60
	5	4	13,5	15	0,90	1080	1,58

## 25/50M IRRIGATION REEL

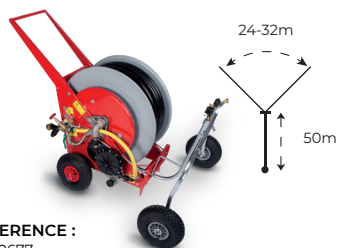

REFERENCE :  
N000677




IRRIGATION TROLLEY  
ADJUSTABLE IN WIDTH  
FROM 83CM-105CM

WORKING WIDTH	24 - 32 m
HOSE LENGTH	50 m
WINDING SPEED	8 - 40 m/h
SURFACE WATERED	1600 m <sup>2</sup>
WEIGHT	60 kg

PIPE DIAMETER	INPUT PRESSURE	FLOW RATE		MAXIMUM WATERING RANGE	USEFUL WATERING RANGE	RAIN INTENSITY IN MM		
		L/MIN	M <sup>3</sup> /H			M	85%	10M/H
5	2,3	20	1,2	24	20	5,0	2,5	1,7
	2,8	22	1,3	26	22	5,1	2,6	1,7
	3,8	27	1,6	28	24	5,8	2,9	1,9
6	3,0	32	1,9	28	24	6,9	3,5	2,3
	4,0	39	2,3	30	26	7,8	3,9	2,6
7	3,0	42	2,5	29	25	8,7	4,4	2,9
	4,0	52	3,1	32	27	9,8	4,9	3,3

## 32/70M IRRIGATION REEL

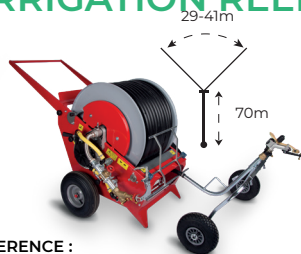

REFERENCE :  
N000679



IRRIGATION TROLLEY  
ADJUSTABLE IN WIDTH  
FROM 83CM-105CM

WORKING WIDTH	29 - 41 m
HOSE LENGTH	70 m
WINDING SPEED	8 - 30 m/h
SURFACE WATERED	3000 m <sup>2</sup>
WEIGHT	110 kg

PIPE DIAMETER	INPUT PRESSURE	FLOW RATE		MAXIMUM WATERING RANGE	USEFUL WATERING RANGE	RAIN INTENSITY IN MM		
		L/MIN	M <sup>3</sup> /U			M	85%	10M/H
6	3	32	1,9	29	25	6,6	3,3	2,2
	4,2	39	2,3	33	28	7,1	3,6	2,4
	5,3	45	2,7	35	30	7,7	3,9	2,6
7	3,3	42	2,5	30	26	8,4	4,2	2,8
	4,6	52	3,1	34	29	9,2	4,6	3,1
	5,8	60	3,6	37	31	9,7	4,9	3,2
8	3,9	57	3,4	34	29	10,1	5,1	3,4
	5,0	69	4,1	38	32	10,9	5,5	3,6
	6,0	80	4,8	41	35	11,7	5,9	3,9

## 32/120M IRRIGATION REEL

IRRIGATION TROLLEY ADJUSTABLE  
IN WIDTH FROM 75CM-105CM



REFERENCE :  
N000678

WORKING WIDTH	33 - 41 m
HOSE LENGTH	120 m
WINDING SPEED	8 - 30 m/h
SURFACE WATERED	4 800 m <sup>2</sup>
WEIGHT	200 kg

PIPE DIAMETER	INPUT PRESSURE	FLOW RATE		MAXIMUM WATERING RANGE	USEFUL WATERING RANGE	RAIN INTENSITY IN MM		
		L/MIN	M <sup>3</sup> /H			10M/H	20M/H	30M/H
6	4,2	39	2,3	33	28	7,1	3,6	2,4
	5,3	45	2,7	35	30	7,7	3,9	2,6
7	3,3	42	2,5	30	25,5	8,4	4,2	2,8
	4,6	52	3,1	34	29	9,2	4,6	3,1
	5,8	60	3,6	37	31	9,7	4,9	3,2
8	3,9	57	3,4	34	29	10,1	5,1	3,4
	5,0	69	4,1	38	32	10,9	5,5	3,6
	6,0	80	4,8	41	35	11,7	5,9	3,9

## 50/150M IRRIGATION REEL

IRRIGATION TROLLEY ADJUSTABLE  
IN WIDTH FROM 100CM-150CM



REFERENCE :  
N000680

WORKING WIDTH	36 - 52 m
HOSE LENGTH	150 m
WINDING SPEED	8 - 30 m/h
SURFACE WATERED	7 600 m <sup>2</sup>
WEIGHT	360 kg

PIPE DIAMETER	INPUT PRESSURE	FLOW RATE		MAXIMUM WATERING RANGE	USEFUL WATERING RANGE	RAIN INTENSITY IN MM		
		L/MIN	M <sup>3</sup> /H			10M/H	20M/H	30M/H
9	3,0	88	5,3	36	31	14,7	7,4	4,9
	4,0	107	6,4	40	34	16	8,0	5,3
	5,1	124	7,4	43	37	17,3	8,7	5,8
10	3,0	107	6,4	38	32	16,9	8,5	5,6
	4,2	130	7,8	42	36	18,6	9,3	6,2
	5,3	151	9	45	38	20,1	10,1	6,7
12	3,3	149	8,9	42	36	21,3	10,7	7,1
	4,7	182	10,9	47	40	23,2	11,6	7,7
	6,0	211	12,6	50	44	24,3	12,2	8,1

## OPTION FOR IRRIGATION REEL



### IRRIGATION BOOM

Available in widths from 10 m to 16 m



### IRRIGATION BOOM FOR GREENHOUSES 6/8 M (32/120 and greater)



# WATERING AND IRRIGATING

In order to maintain and irrigate the various crops in diversified market gardening, we offer a wide range of dedicated equipment. Our range is specially dedicated to small and medium-sized farms.

Find the entire range, parts and their characteristics on our website.

## RANGE OF FITTINGS



HOSE COUPLING WITH 6 LOCKING BALLS (BLUE RING)



HOSE COUPLING WITH 6 LOCKING BALLS AQUA-STOP (RED RING)



QUICK FEMALE CONNECTOR



A COMPLETE RANGE OF BRASS CONNECTING NIPPLE Male nipple / Female nipple

## RANGE OF TAPS AND ACCESSORIES



LEVER TAP (WITHOUT SPOUT CONNECTION)



1/4 TURN TAP (WITHOUT SPOUT CONNECTION)



TANK TAP KIT 1/4 turn tap / lever tap



## NOZE TAP



CIRCUIT SELECTOR



THREADED SPOUT MOBILE HEX NUT



SPOUT WITH HOSE CONNECTION MOBILE NOTCHED NUT

## IRRIGATION TUBES AND ACCESSORIES



HOSE CLAMP



IRRIGATION TUBES



SEAL

# VEGETABLE WHEELBARROW



Single, double-wheel, wide-track market gardening wheelbarrow

Thanks to its Ø30mm tube frame, it has the rigidity and strength needed for transporting heavy loads. With a load capacity of 150kg, it will find plenty of uses on your farm.

**NEW**

		SUPPORT BASE LENGTH	SUPPORT BASE WIDTH	WHEEL	CENTRAL TRACK/WHEEL CENTRE	REFERENCE
1	Simple kit	100	67	Single	/	T000376
		120	67	Single	/	T000377
2	Double kitw	100	67	Double	67	T000378
		120	67	Double	67	T000379
		160	67	Double	67	T000380
3	Wide track double kit	100	67	Double	110	T000381
		120	67	Double	110	T000382
		160	67	Double	110	T000383



**NEW**

Multi-purpose trolley in kit 100 - 120 - 160

	SUPPORT BASE LENGTH	SUPPORT BASE WIDTH	WHEEL	CENTRAL TRACK/WHEEL CENTRE	REFERENCES
4	100	67	Double	68	T000384
	120	67	Double	68	T000385
	160	67	Double	68	T000386

# ELECTRIC VEGETABLE WHEELBARROWS



PANASONIC BATTERY (AGM)	12 V 22 A (450 recharge cycles)
BATTERY CHARGER	12 Volts
SPEED WITH FULL LOAD	3.5 km/hour (empty) 5 km/hour
FUSE	40A removable
MAXIMUM STEP HEIGHT	20cm
MAXIMUM GRADIENT WITH FULL LOAD	35°
BATTERY LIFE	4 to 6 hours of continuous work under full load

ELECTRIC WHEEL KIT	REFERENCES
Single wheel	T000387
Double wheel	T000388
Wide track double	T000390
Double for multi-purpose trolley	T000389



**NEW**

Terrateck wheelbarrows and trolleys can be fitted with an electric wheel kit to replace the original single wheel.

A remote control at the handle will activate a powerful motor

for transporting a load of 120kg effortlessly, with a battery life of 4 to 6 hours. Thanks to the disengageable motor, the electric wheelbarrows can be used in "manual" mode.



**FODDER BARRIER FOR SINGLE/DOUBLE VEGETABLE WHEELBARROW**  
T000391





# HANDLING AND TRANSPORT



**WHEEL LADDER RANGE**  
(6 sizes available)

Elevation: from 1.05m to 1.95m  
Wheelbase: from 1m to 1.20m

**Check out the full range on our website**



**VEGETABLE WHEELBARROW**

**1M TRAY: N000746**  
Tray length: 1m  
Platform width: 0.52 m

**1.2M TRAY : N000821**  
Tray length: 1.20 m  
Platform width: 0.52 m



**FORKLIFT TROLLEY**  
N000748

Length 0.30cm  
Minimum height 1.65m



**SPECIAL GREENHOUSE WHEELBARROW**  
N000756

Platform length: 1.10 m + 0.40 m above wheel  
Platform width: 0.42m



**2-WHEEL TROLLEY**  
N000757

Length: 2m  
Width: 0.60m



**SAVOIE WINE-GROWING WHEELBARROW**  
N000755

Platform length: 1.20 m + 0.40 m above wheel  
Platform width: 0.52m



**PICKING TROLLEY**  
N000758

For 2 crates: 60 x 40 widthwise



**HANDCART FOR CRATES**  
N000745

For 2 crates: 60x40 long



**WOODEN CRATE GATE**  
N000753

For wood crate:  
100 cm x 120 cm et 120 cm x 120 cm

## PACKAGING AND DIRECT SALE




ADHESIVE TAPE	19 mm x 100 m
MAX. FASTENING THICKNESS	65 mm
MIN. FASTENING THICKNESS	10 mm
LENGTH	250 mm
HEIGHT	210 mm
MOUNTED WITH A CLAMP OR WOOD SCREW	

The manual binding-taping machine is used for manually bunching fresh vegetables without any fuss. This very versatile piece of equipment is tailored to binding vegetables with adhesive tape for market gardening production operations.



**BINDING/TAPING MACHINE  
PORTABLE ON BELT**  
T000392



**BINDING-TAPING MACHINE**  
T000033



**RED ADHESIVE  
(CUSTOMISABLE)**  
12 mm x 66 m : N000981  
19 mm x 100 m : N000761



**PAPER BAG HOLDER**  
T000069



**APRON FOR RETAIL AND MARKET**  
N000803

## MANUAL BUNDLING AND TYING TOOL



**NEW**

ATTACHMENT DIAMETER	60 mm
OPENING DIAMETER	82 mm
LOADED WEIGHT	650g
BUNDLING CAPACITY/BALLS	300 to 350 bundles
COMES WITH	1 spool of thread and 1 spool of strapping

The manual tying tool is used to mechanise bundling operations in the fields. It is ideal for bundles of vegetables or aromatic herbs harvested on market gardens.

Whether you are outdoors, in a greenhouse or in a workshop, this tool is used to bundle plants with an elastic tie crimped using a small aluminium alloy ring.

The model without thread return is for bundling leafy vegetables so that the thread doesn't pose an obstacle to the operator when removing the bundle from the tool. This model is perfectly suited to crops with lots of foliage.

The model with thread return is for making bundles of herbs without having to complete the "thread return" step. This model is perfectly suited to bundled crops at their stems.



**MANUAL BUNDLING AND TYING TOOL**  
With recall: N000817  
Without recall: N000816



**THREAD BALL FOR THE MANUAL BUNDLING TOOL**  
N000819



**ALUMINIUM STRAPPING FOR THE MANUAL BUNDLING TOOL**  
N000820



# EQUIPMENT FOR THE PRODUCER

APRON

APRON FOR RETAIL AND MARKET

TERRATECK BIB TROUSERS

REINFORCED KNEE PAD

TERRATECK JACKET

LONG SLEEVES

WATERPROOF LEG/KNEE PROTECTION

RAIN HAT

GLOVES



# EQUIPMENT FOR THE PRODUCER

Terrateck selects a range of high-performance and comfortable clothing in order to satisfy the most demanding professionals.


Grundéns, which is based in Sweden at the heart of the Swedish textile industrial basin, develops its products in close collaboration with extremely demanding users and in extreme conditions. In a region of the world where rain is as prevalent as the sun, the Grundéns products offer unparalleled resistance to weather and cold, while guaranteeing a long service life.

Drawing on its know-how, Terrateck aims to offer its market gardeners, nursery owners or arboriculturists the best available working equipment. That's why we have developed an exclusive partnership with Grundéns France and selected the best equipment to meet your every need.

## SIZES GUIDE

SIZES cm	S	M	L	XL
Hat Head measurement	55 - 56	57 - 58	59 - 60	61 - 62

SIZES	XXS	XS	S	M	L	XL	XXL	XXXL
Men	42	44	46	48 - 50	52 - 54	56 - 58	60 - 62	64
Women	32	34 - 36	38 - 40	42 - 44	46 - 48	50 - 52		

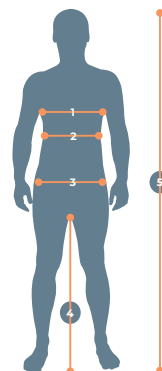

SIZES cm	C44	C46	C48	C50	C52	C54	C56	C58	C54	C56	C58
1	88	92	96	100	104	108	112	116	120	124	128
2	76	80	84	88	92	96	100	104	108	112	116
3	94	98	102	106	110	114	118	122	126	130	134
4	78	80	81	82	83	84	85	86	87	88	88
5	164 170	170 176	176 182	176 182	182 188	182 188	188 194	188 194	188 194	188 194	188 194

### HDX05

- ▶ PVC-coated polyester
- ▶ 330 g/m<sup>2</sup>

### HDX11

- ▶ PVC-coated cotton
- ▶ 540 g/m<sup>2</sup>
- ▶ Resistant to low temperatures
- ▶ Very resistant to abrasion and wear

### HDX12

- ▶ PVC-coated cotton
- ▶ 610 g/m<sup>2</sup>
- ▶ Resistant to low temperatures
- ▶ Very resistant to abrasion and wear



## APRON

Apron with adjustable neck and waistband, quick-release clips at the chest and back, reinforced bottom corners.

SIZE	REFERENCE	DENSITY	HDX11
One size	N000802	540 g/m <sup>2</sup>	



## APRON FOR RETAIL AND MARKET

Comfortable ergonomic apron for selling in market stalls, farm stores, small farmers associations, etc. In a coated cotton canvas, it's unisex and can be worn by men as well as women. The back crossover straps make it possible to adjust the apron for optimal comfort when handling cases and bags of vegetables.

SIZE	REFERENCE
One size	N000803

## EQUIPMENT FOR THE PRODUCER



### TERRATECK BIB TROUSERS

Long bib & brace overalls with adjustable waist. Front/back reversible for superior durability, reinforced hems and highly resistant quick-release replaceable elasticated braces. Loose fit.

SIZES	REFERENCES	DENSITY	HDX12
S	N000783	230 g/m <sup>2</sup>	
M	N000776		
L	N000775		
XL	N000784		



### TERRATECK REINFORCED BIB TROUSERS

Reinforced bib trousers with adjustable waist. Front/back reversible for superior durability, reinforced hems and highly resistant quick-release replaceable elasticated braces. Loose fit.

SIZES	REFERENCES	DENSITY	HDX12
XS	N000781	500 g/m <sup>2</sup>	
S	N000779		
M	N000778		
L	N000777		
XL	N000780		
XXL	N000782		



### REINFORCED KNEE PADS\*

\*REINFORCED KNEE PADS FOR BIB & BRACE OVERALLS.

\*Compatible with the reinforced coveralls only.

SIZE	REFERENCE
One size	N000799

## EQUIPMENT FOR THE PRODUCER



### TERRATECK LIGHT JACKET (WITH HOOD)

Pullover jacket in PVC with neoprene cuffs and waterproof breast pocket. Loose fit.

SIZES	REFERENCES	DENSITY	HDX11
S	N000808	230 g/m <sup>2</sup>	
M	N000807		
L	N000806		
XL	N000809		
XXL	N000810		



### TERRATECK JACKET (WITHOUT HOOD)

PVC smock top (HDX11) with neoprene cuffs, chest pocket, lined collar in reinforced corduroy, polyester/cotton chest and shoulder panels. Loose fit.

SIZES	REFERENCES	DENSITY	HDX11
S	N000811	540 g/m <sup>2</sup>	
M	N000805		
L	N000804		
XL	N000812		
XXL	N000813		



### LONG SLEEVES

Long sleeves with neoprene cuffs and velcro biceps adjustment

SIZES	REFERENCES	DENSITY	HDX11
M	N000801	540 g/m <sup>2</sup>	
L	N000800		

## EQUIPMENT FOR THE PRODUCER



### WATERPROOF LEG/KNEE PROTECTION

Perfect seal on the lower legs with a waterproof pocket behind the knee to add a foam kneepad.

Belt hook and harness support system.

Flexibility and resistance to friction thanks to the specific coating.

#### SUPPLIED WITH KNEE PADS

SIZE	REFERENCE	DENSITY	HDXII
Adjustable	T000300	500g/m <sup>2</sup>	



### RAIN HAT

Hat with polyester flannel lining, ear flaps, adjustable chin strap, edge-to-edge anti-drip visor and neck protection.

SIZES	REFERENCES	DENSITY
S	N000787	330 g/m <sup>2</sup>
M	N000786	
L	N000785	
XL	N000788	



### LONG WATERPROOF GLOVE

The pair of long waterproof gloves is for harvesting and cleaning vegetables without wetting your forearms. These gloves made of nitrile are 100% waterproof and have a rough finish for superior dexterity. The end of the glove is edged with an elastic to hold the glove firmly in place and prevent water from getting inside.

SIZES	REFERENCES
L	N000883
XL	N000884
XXL	N000885

**NEW**

## EQUIPMENT FOR THE PRODUCER



### WATERPROOF WINTER WORK GLOVES

These winter gloves are fully waterproof as they are entirely coated in a latex foam with a second latex coating at the palm and a reinforced rough finish.

Protects from the cold with a bouclé knit lining.

SIZES	REFERENCES	PACKAGING
L	N000793	5 pairs pack
XL	N000794	
XXL	N000795	



### WATERPROOF WORK GLOVES

These gloves are fully waterproof as they are entirely coated in a latex foam with a second latex coating at the palm and a reinforced rough finish.

SIZES	REFERENCES	PACKAGING
M	N000789	5 pairs pack
L	N000790	
XL	N000791	
XXL	N000792	



### SPRING WORK GLOVES

Spring work gloves that protect the hands from moisture and abrasion with a coated latex palm coating with a rough finish. They provide insulation from the cold thanks to a terry loop knitted lining.

SIZES	REFERENCES	PACKAGING
L	N000796	5 pairs pack
XL	N000797	
XXL	N000798	



# TERMS AND CONDITIONS OF SALE

## ARTICLE 1: GENERAL POINTS

On placing any order (by email/fax/post) with Terrateck, the Buyer shall be deemed to have accepted these terms and conditions and renounced its own terms and conditions of purchase, including the union requirements. This acceptance is deemed valid if no reservations are made by the Buyer within 10 days.

The prices and information contained in the catalogues, brochures and price lists are not binding upon Terrateck that reserves the right to make modifications. Terrateck shall only be bound by the commitments that may be made by its representatives or employees, subject to an agreement issued by Terrateck. This agreement shall be deemed valid should it not be contested by Terrateck within 8 working days of receiving the order. The sales contract is only valid subject to the acceptance of the buyer's request by Terrateck.

## ARTICLE 2: DELIVERY TIME

The delivery times are given in accordance with the information available to Terrateck on the day of the order. Under no circumstances shall any compensation be paid for a late delivery. Terrateck automatically disclaims all liability pertaining to the delivery times:

If the Buyer violates the payment terms

In the event of force majeure

In the case of a shortage of raw materials

## ARTICLE 3: PRICE

Terrateck's prices are provided ex-works, in Euros, exclusive of tax, based on the exchange rate on the day of the order. They may be revised in the event of a significant change in monetary parity. They may also be revised in the event of a significant and sudden increase in the price of raw materials. In such an event, the details will be set out in the special terms and conditions.

## ARTICLE 4: TRANSPORT AND DELIVERY

Regardless of the transport mode, shipments will be fulfilled under the express responsibility of the Buyer. The Buyer shall bear the expenses, liability and risks for the transport, insurance, customs and excise and handling operations in shipping the products to the site and shall be responsible for inspecting the shipments on arrival and making any necessary claims against the carriers.

In the event of a shipment fulfilled by Terrateck, the Buyer agrees to express its reservations on delivery. These reservations shall be added to the delivery note. Any claim made at a later date shall not be taken into consideration. In the event of the client picking up a shipment directly from Terrateck, the products shall be deemed inspected at the time of collection. Under no circumstances shall a transport credit note be accepted should the Buyer organise the collection of the equipment.

Each delivery shall be accompanied by a delivery note containing all the details about the delivered products. The buyer must inform Terrateck of any differences observed as quickly as possible.

If no reservations are expressed, Terrateck's deliveries shall be deemed to have been fulfilled correctly and in compliance with the delivery note.

## ARTICLE 5: PAYMENT AND RETENTION OF TITLE

Payment shall be made in accordance with the terms agreed when the order is placed. Should a payment by banker's draft be accepted, the Buyer agrees to return the acceptance within eight days of receiving the invoice or corresponding statement. In the event of a cash payment by cheque, the Buyer agrees to settle the payment on receiving the invoice. In these cases, no delivery shall be fulfilled until the banker's draft or cheque has been received by Terrateck. Invoices must be paid in accordance with the terms set out on the invoice, without any discount. The retention of title of the item sold is subject to the payment by the Buyer of the full price by the payment date or dates in accordance with the French law of 12 May 1980. However, the risks shall be transferred on delivery.

Should the payments not be settled on the dates agreed by the parties, Terrateck reserves the right to retrieve the item delivered and rescind the contract if it sees fit.

Any expenses associated with this return operation shall be borne by the Buyer.

By express agreement, Terrateck's sales contracts shall still remain valid under the condition subsequent of the full payment by the Buyer on the set due date or dates.

The issuance of a banker's draft or any other document incurring an obligation to pay shall not constitute payment under this provision.

Regardless of any previous agreements concluded previously, all outstanding amounts shall become immediately due should one of the payments not be settled by the set date. Regardless of the agreed mode of payment, any payment that is late by more than 8 (eight) days in relation to the set due dates shall result in the following, without the requirement to give notice:

The right of Terrateck to suspend the performance of any other orders, which may have been accepted, notwithstanding any claims for damages.

An interest on arrears of 2% per year on the total debt, inclusive of tax, from the contractual payment date until the day of payment. In France, the invoicing of interest payments is subject to VAT at the applicable rate.

A contractual penalty of 15% of the total debt, inclusive of tax, in the event of the Buyer's non-payment causing Terrateck to initiate pre-litigation proceedings.

The invoicing of any kind of expenses incurred by Terrateck or borne by it.

## ARTICLE 6: WARRANTY

Terrateck and the buyer mutually recognise that they familiar with the products sold in accordance with professional standards.

### 6.1. Warranty conditions

Terrateck's products are guaranteed for one year from the date of delivery. The warranty is simply restricted to the replacement of the parts deemed defective by Terrateck's technical department. Any shipment and labour costs shall be borne by the Buyer. Any request to activate the warranty must be accompanied by the defective part, the machine number + invoice as well as the date of first use.

Wear parts, tyres and flexible hoses are not included in the warranty. Any improper use of the equipment, modification to the equipment by an unauthorised person without the approval of Terrateck or the use of non-original spare parts

will void the warranty.

In order to benefit from this cover, the Buyer must notify Terrateck in writing as quickly as possible of the defects attributed to the product, along with any evidence to support the latter. The buyer must give Terrateck every opportunity to examine these defects and provide a solution to them. The warranty shall apply for one year from the reception of the duly completed warranty certificate by Terrateck within 8 days of the invoice date.

### 6.2. Obligation of the parties

Terrateck is only required to ensure the compliance of its product in relation to the specifications of its technical data sheets, which are available on request. The Buyer shall be responsible for the product chosen and the suitability of the machine with the result expected by the Buyer or its client. It is responsible for its proper use in accordance with professional standards and the regulations. Under no circumstances is Terrateck bound by a performance obligation. The Buyer or Retailer shall be responsible for advising its own customers on how to use the products properly. Terrateck shall be at the disposal of the Buyer Retailer to assist the latter to the best of its knowledge and experience. The Buyer Retailer is responsible for providing its customer user with the equipment's accompanying documents (instructions, warranty card, certificate of compliance, etc.) Terrateck shall be at its disposal to provide any missing documents, if needed.

### 6.3. Out-of-warranty services

An initial quote will be drawn up prior to any servicing and replacement of parts not covered by the warranty undertaken by Terrateck's after-sales department. The expenses of the after-sales services carried out by Terrateck's technicians shall be borne by the Buyer.

### 6.4. Case of Terrateck as manufacturer

When acting as manufacturer or sub-contractor, Terrateck shall only be responsible for its own work.

### 6.5. Force majeure

Terrateck shall be released from its contractual obligations in the event of force majeure. Force majeure accidents affecting Terrateck's production and storage, the unavailability or shortage of supplies, the default of a carrier, fire, flooding, broken machinery, strike action involving all or part of the staff, public decisions, the actions of a third party, war or any external event which delays, prevents or renders the performance of Terrateck's commitments economically exorbitant shall discharge or suspend Terrateck's obligations without incurring any liability to the Buyer.

## ARTICLE 7: EQUIPMENT IN STORAGE OR USED FOR DEMONSTRATION PURPOSES

The acceptance of the equipment by the agent shall be deemed acceptance of Terrateck's terms and conditions of sale as well as the stipulations which are specific to equipment storage. In addition to the provisions of article 4 above, in the event of the equipment being stored by Terrateck, the depository agrees to the following:

To pay for the outbound-inbound shipping expenses and the handling entailed by the equipment concerned;  
Take any provisions needed to preserve and maintain equipment in good condition.

Not to withdraw any parts without Terrateck's written consent.

To bear all expenses for repairing any damage to the equipment incurred during storage;

Return the said equipment to Terrateck on its request or when the agreed storage period expires;

Immediately notify Terrateck in the event of a sale;

Insure the stored equipment as "third-party goods" with an insurance company that is known to be solvent and give documentary evidence of this policy to Terrateck on request; the coverage of the latter must be at least equal to the value of the equipment;

Take out any insurance that it deems necessary for the stored equipment in order to cover its own needs.

In the event of the equipment being used for demonstration purposes, the depository shall be exclusively responsible for the conditions in which the machine is demonstrated and used. It may not, under any circumstances, without the prior written consent of Terrateck, use it for any other purpose than its demonstration, or entrust it to any other party, regardless of the use. If, on the expiry of the agreed storage period, the equipment is not returned to Terrateck, the latter will have the option to take back the equipment or charge the depository for it. The invoice concerned will be made out in accordance with the usual terms and conditions of sale. Should the equipment be returned in poor condition, Terrateck shall undertake any reconditioning work at the expense of the depository. Terrateck shall charge the depository for the said expenses.

## ARTICLE 8: INSURANCE AND LIABILITY

Terrateck is insured for all of the risks generally associated with its activity with a level of cover that is generally associated with the profession. It keeps the valid certifications and warranty tables at the disposal of its customers. The client renounces any claim of any kind that should exceed Terrateck's warranty limits and the parties expressly agree that the latter is of the essence of the contract.

## ARTICLE 9: SPECIAL CONDITIONS

These terms and conditions of sale do not exclude the application of the special terms and conditions of sale.

## ARTICLE 10: GOVERNING LAW AND COURT OF COMPETENT JURISDICTION

Terrateck's sales as well as any related agreements shall be governed by French law. The Buyer's orders are placed, provided that, in the event of a dispute relating to the supplies and payment, the commercial court of Bethune shall be the court of competent jurisdiction, excluding any other court that may be appointed by the buyer, even in the case of more than one defendant. All documents must be drafted in French.



**MORE THAN 100 RESELLERS**  
in France and International

**DISTRIBUTED BY:**

## **CONTACT US**

Tel : **+33(0) 3 74 05 10 10**  
Mail : **contact@terrateck.com**

**[www.terrateck.com](http://www.terrateck.com)**

600 rue Adam Grunewald  
62136 Lestrem, France

**Terrateck**

